
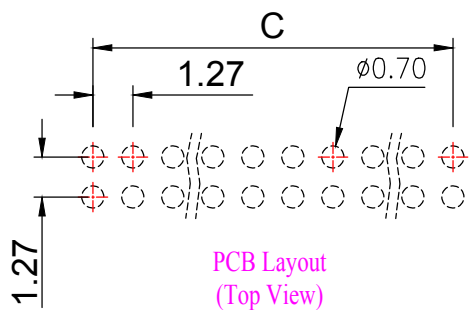
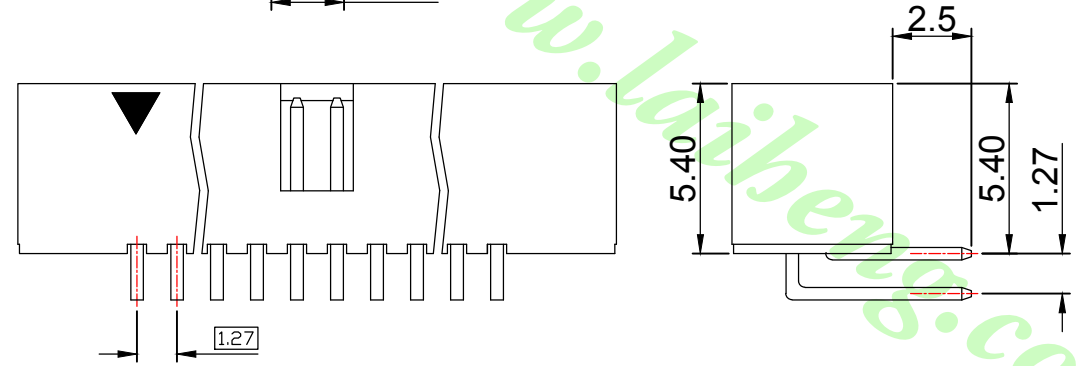


RoHS

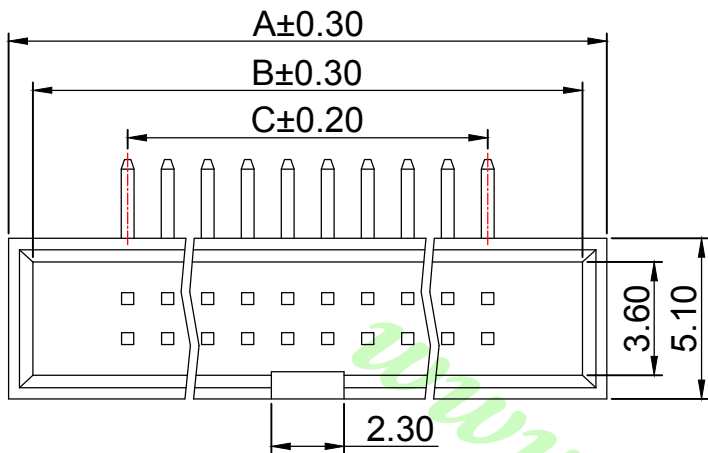

SPECIFICATIONS

Material and Finish

- . Housing: LCP (UL94V-0), Black.
- . Terminal: Sq. 0.4mm Copper Alloy, Gold Plating.

Electrical Characteristics

- . Current Rating: 1.0 Amp. Max..
- . Dielectric Withstand Voltage: 600V AC RMS for 60Seconds.
- . Insulation Resistance: 1000M Ohms Min. at 500V DC.

Mechanical Characteristics

- . Operating Temperature: -55°C ~ +105°C

Order Information	Dimensions				Order Information	Dimensions			
	Pos.	A	B	C		Pos.	A	B	C
LBH127R-10	10	12.65	11.10	5.08	LBH127R-34	34	27.89	26.34	20.32
LBH127R-12	12	13.92	12.37	6.35	LBH127R-40	40	31.70	30.15	24.13
LBH127R-14	14	15.19	13.64	7.62	LBH127R-44	44	34.24	32.69	26.67
LBH127R-16	16	16.46	14.91	8.89	LBH127R-50	50	38.05	36.50	30.48
LBH127R-20	20	19.00	17.45	11.43	LBH127R-60	60	44.40	42.85	36.83
LBH127R-24	24	21.54	19.99	13.97	LBH127R-64	64	46.94	45.39	39.37
LBH127R-26	26	22.81	21.26	15.24	LBH127R-68	68	49.48	47.93	41.91
LBH127R-28	28	24.08	22.53	16.51	LBH127R-80	80	57.10	55.55	49.53
LBH127R-30	30	25.35	23.80	17.78	LBH127R-100	100	69.80	68.25	62.23

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		單位/Unit: mm	品名(Title):	1.27*1.27mm Box Header PCB Mount Right Angle Type (90°), Dual Rows (for IDC)	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
.X	±0.30	比例/Scale: Free	料號/Part No: LBH127R-XX		
.XX	±0.20	Size: A4			核對/APPD: Joe
.XXX	±0.10			製圖/DR: Mandy	報數/Sheet: 1 of 1
A0	NEW DRAWING	2019.07.26			REV: A0
REV	概述/REVISION	日期/DATE			