
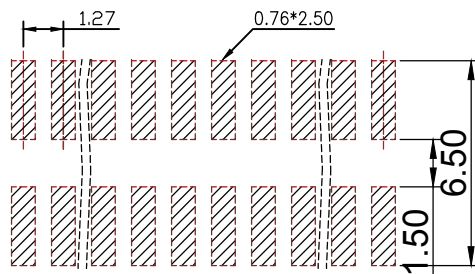
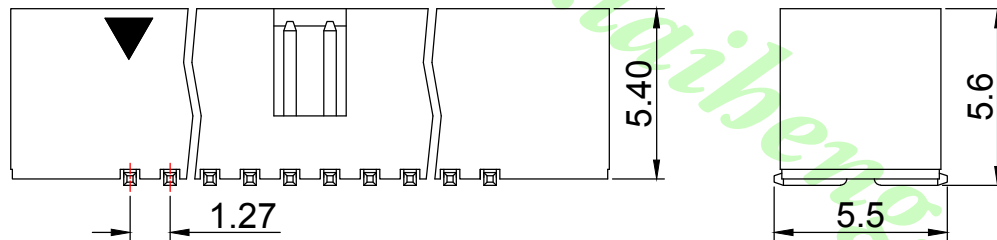


ROHS

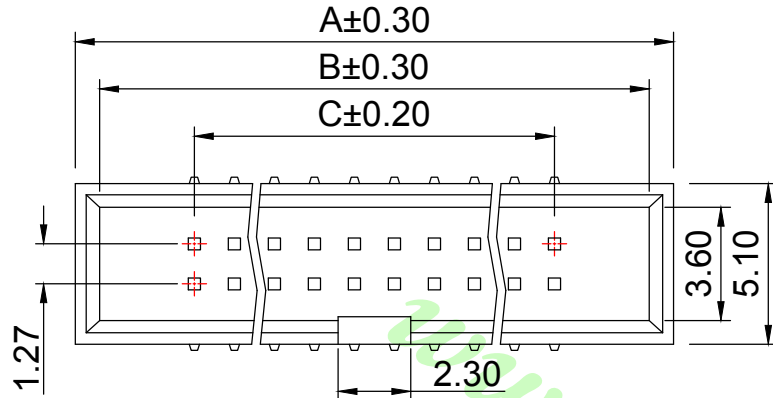

PCB Layout
(Top View)

SPECIFICATIONS

Material and Finish

- . Housing: LCP (UL94V-0), Black.
- . Terminal: Sq. 0.4mm Copper Alloy, Gold Plating.

Electrical Characteristics

- . Current Rating: 1.0 Amp. Max..
- . Dielectric Withstand Voltage: 600V AC RMS for 60Seconds.
- . Insulation Resistance: 1000M Ohms Min. at 500V DC.

Mechanical Characteristics

- . Operating Temperature: -55°C ~ +105°C

Order Information	Pos.	Dimensions			Order Information	Pos.	Dimensions		
		A	B	C			A	B	C
LBH127T-10	10	12.65	11.10	5.08	LBH127T-34	34	27.89	26.34	20.32
LBH127T-12	12	13.92	12.37	6.35	LBH127T-40	40	31.70	30.15	24.13
LBH127T-14	14	15.19	13.64	7.62	LBH127T-44	44	34.24	32.69	26.67
LBH127T-16	16	16.46	14.91	8.89	LBH127T-50	50	38.05	36.50	30.48
LBH127T-20	20	19.00	17.45	11.43	LBH127T-60	60	44.40	42.85	36.83
LBH127T-24	24	21.54	19.99	13.97	LBH127T-64	64	46.94	45.39	39.37
LBH127T-26	26	22.81	21.26	15.24	LBH127T-68	68	49.48	47.93	41.91
LBH127T-28	28	24.08	22.53	16.51	LBH127T-80	80	57.10	55.55	49.53
LBH127T-30	30	25.35	23.80	17.78	LBH127T-100	100	69.80	68.25	62.23

A0	NEW DRAWING	2019.07.26
REV	概述/REVISION	日期/DATE

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		單位/Unit	品名(Title):
.X	±0.30	mm	1.27*1.27mm Box Header PCB Surface Mount Type ,Dual Rows (for IDC)
.XX	±0.20	比例/Scale	
.XXX	±0.10	Free	
		Size	料號/Part No: LBH127T-XX
		A4	圖號/Drawing No: HD222804-002XX



鍊亨電子有限公司

LAI HENG TECHNOLOGY LTD.
TEL: (02) 8228-6487 FAX: (02) 8228-6486

核對/APPD. 74o	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
--------------	--------------	--------------	-----------------	---------