

ROHS

SPECIFICATIONS

Material and Finish




- . Housing: Thermoplastic (UL94V-0), Black.
- . Terminal: Sq. 0.50mm Copper Alloy, Gold Plating.

Electrical Characteristics

- . Current Rating: 1.0 Amp. Max..
- . Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
- . Insulation Resistance: 1000M Ohms Min. at 500V DC.

Mechanical Characteristics

- . Operating Temperature: -55°C ~ +105°C

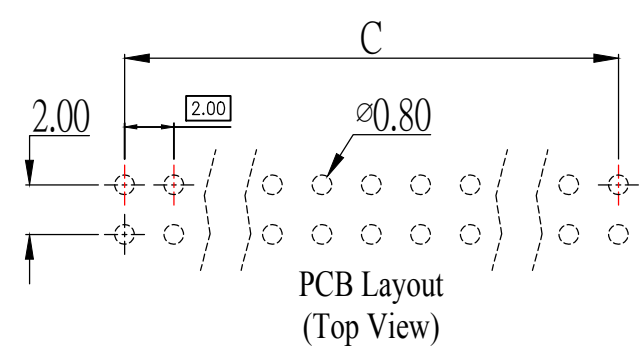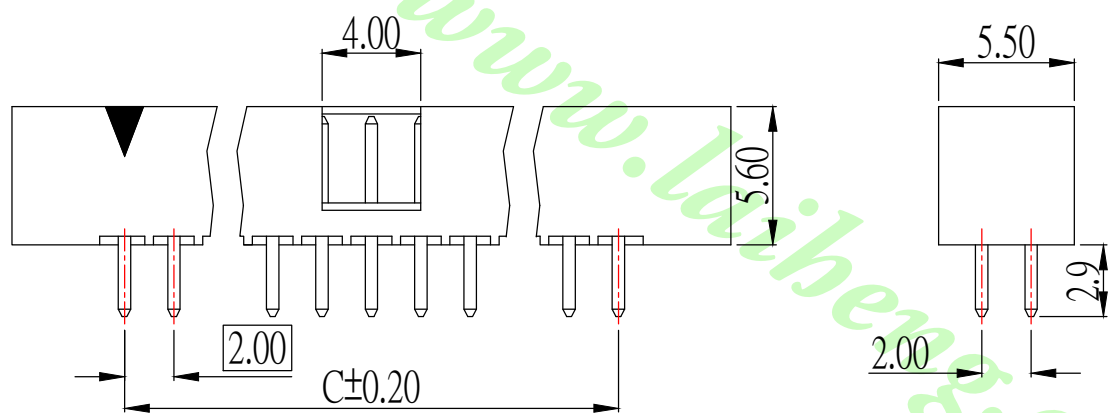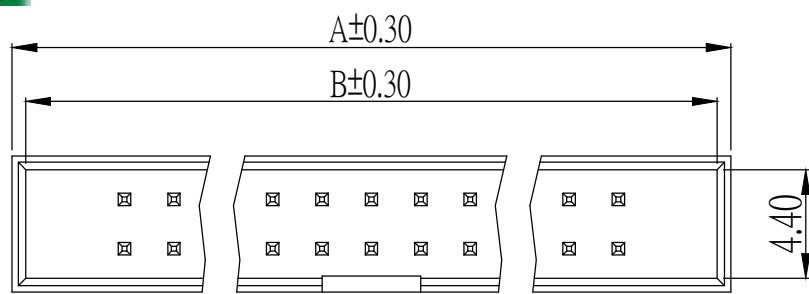

Part No.

LBH 200 S - XX

- No. of Contacts (06~68)
- S: Straight Type (180°)
- 2.00mm Pitch
- Series No.

Dimensions				Dimensions			
Pos.	A	B	C	Pos.	A	B	C
06	13.20	12.10	4.00	28	35.20	34.10	26.00
08	15.20	14.10	6.00	30	37.20	36.10	28.00
10	17.20	16.10	8.00	32	39.20	38.10	30.00
12	19.20	18.10	10.00	34	41.20	40.10	32.00
14	21.20	20.10	12.00	36	43.20	42.10	34.00
16	23.20	22.10	14.00	40	47.20	46.10	38.00
18	25.20	24.10	16.00	44	51.20	50.10	42.00
20	27.20	26.10	18.00	50	57.20	56.10	48.00
22	29.20	28.10	20.00	60	67.20	66.10	58.00
24	31.20	30.10	22.00	64	71.20	70.10	62.00
26	33.20	32.10	24.00	68	75.20	74.10	66.00

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit	品名(Title):		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
SPECIFIED TOLERANCES ARE			mm	2.00mm Box Header PCB Mount Vertical Type (180°)			
.X	±0.30	日期/DATE	比例/Scale	料號/Part No:		核對/APPD.	審核/CHKD.
.XX	±0.20		Free	LBH200S-XX		7/6	Joe
.XXX	±0.10		Size	圖號/Drawing No:		製圖/DR.	Mandy
ANG.	±2°	日期/DATE	A4	HD221601-002XX		報數/Sheet	REV.
A0	NEW DRAWING	2019.07.22				1 of 1	A0
REV	概述/REVISION						