

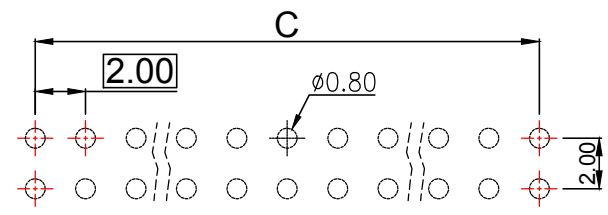
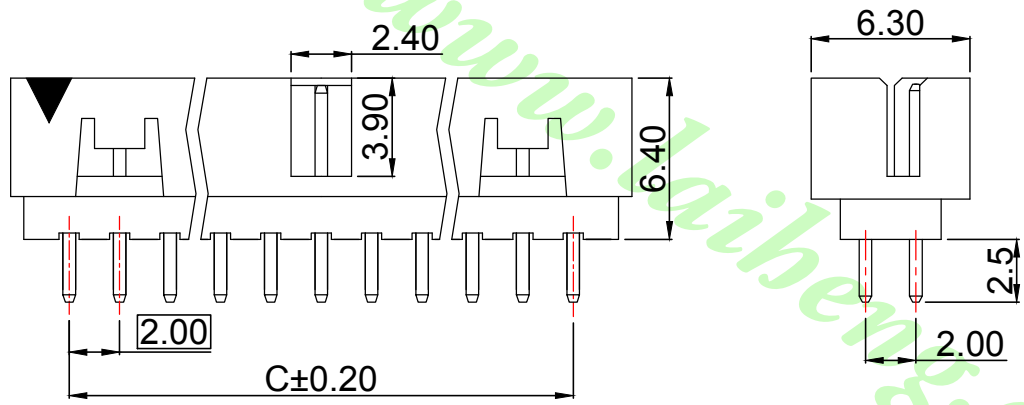


RoHS

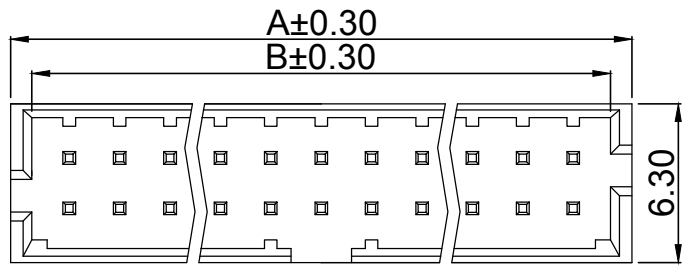

PCB Layout
(Top View)

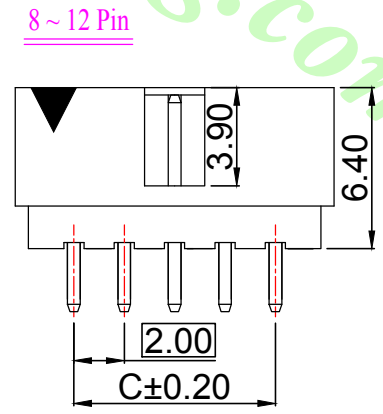

8 ~ 12 Pin

SPECIFICATIONS

Material and Finish

- . Housing: Nylon-6T (UL94V-0),Black.
- . Terminal: Sq. 0.50mm Brass, Gold Plating.

Electrical Characteristics

- . Current Rating: 1.0 Amp. Max..
- . Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
- . Insulation Resistance: 1000M Ohms Min. at 500V DC.

Mechanical Characteristics

- . Operating Temperature: -55°C ~ +105°C

Order Information	Dimension			
	Pos.	A	B	C
LBHM200S-08	08	10.65	8.85	6.00
LBHM200S-10	10	12.65	10.85	8.00
LBHM200S-12	12	14.65	12.85	10.00
LBHM200S-14	14	16.65	14.85	12.00
LBHM200S-16	16	18.65	16.85	14.00
LBHM200S-20	20	22.65	20.85	18.00
LBHM200S-24	24	26.65	24.85	22.00
LBHM200S-26	26	28.65	26.85	24.00
LBHM200S-30	30	32.65	30.85	28.00
LBHM200S-34	34	36.65	34.85	32.00
LBHM200S-40	40	42.65	40.85	38.00
LBHM200S-44	44	46.65	44.85	42.00
LBHM200S-50	50	52.65	50.85	48.00

REV	NEW DRAWING	2019.07.26
	概述/REVISION	日期/DATE

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10

單位/Unit: mm
 比例/Scale: Free
 Size: A4

品名(Title): 2.00mm Box Header, Molex Type
 PCB Mount Vertical Type (180°) Dual Rows
 料號/Part No: LBHM200S-XX
 圖號/Drawing No: HD221602-002XX


鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL: (02) 8228-6487 FAX: (02) 8228-6486
 核對/APPD: Joe 審核/CHKD: Joe 製圖/DR: Mandy 報數/Sheet: 1 of 1