

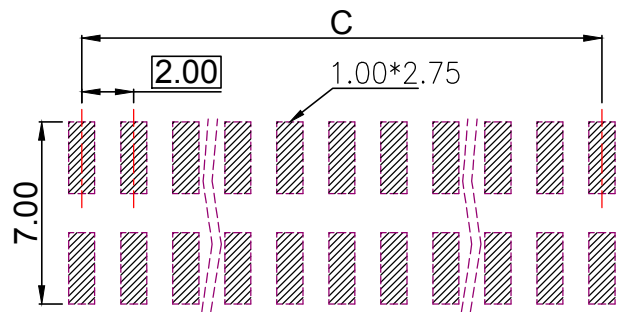
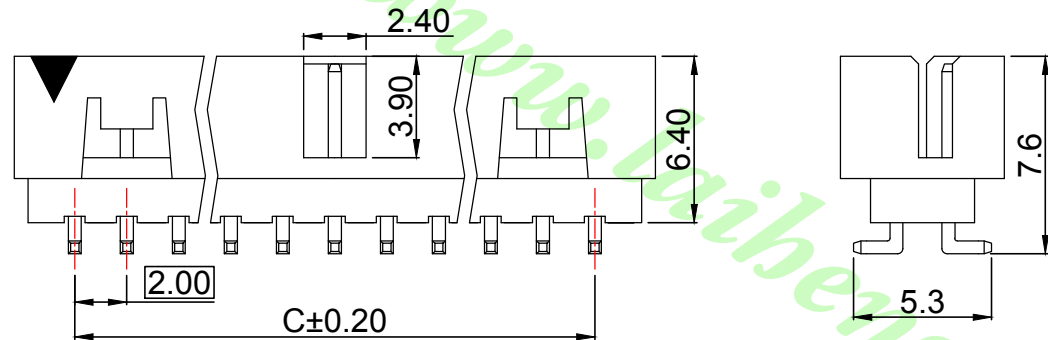


ROHS

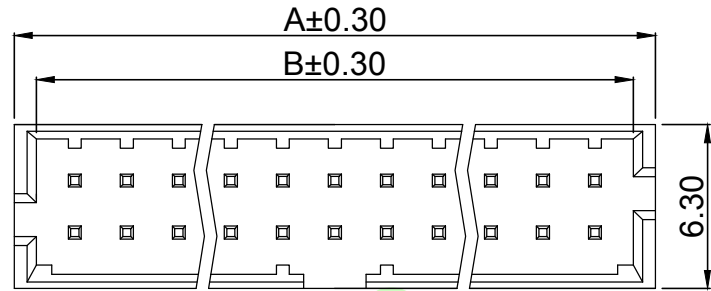

PCB Layout
(Top View)

8 ~ 12 Pin

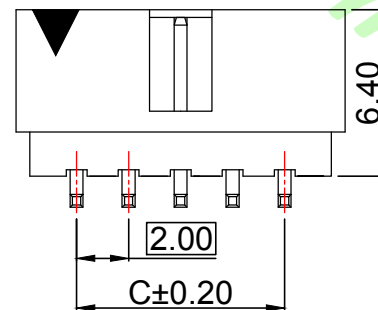

SPECIFICATIONS

Material and Finish

- . Housing: Nylon-6T (UL94V-0),Black.
- . Terminal: Sq. 0.50mm Brass, Gold Plating.

Electrical Characteristics

- . Current Rating: 1.0 Amp. Max..
- . Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
- . Insulation Resistance: 1000M Ohms Min. at 500V DC.

Mechanical Characteristics

- . Operating Temperature: -55°C ~ +105°C

Order Information	Dimension			
	Pos.	A	B	C
LBHM200T-08	08	10.65	8.85	6.00
LBHM200T-10	10	12.65	10.85	8.00
LBHM200T-12	12	14.65	12.85	10.00
LBHM200T-14	14	16.65	14.85	12.00
LBHM200T-16	16	18.65	16.85	14.00
LBHM200T-20	20	22.65	20.85	18.00
LBHM200T-24	24	26.65	24.85	22.00
LBHM200T-26	26	28.65	26.85	24.00
LBHM200T-30	30	32.65	30.85	28.00
LBHM200T-34	34	36.65	34.85	32.00
LBHM200T-40	40	42.65	40.85	38.00
LBHM200T-44	44	46.65	44.85	42.00
LBHM200T-50	50	52.65	50.85	48.00

A0	NEW DRAWING	2019.07.26
REV	概述/REVISION	日期/DATE

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit	品名(Title):
.X	±0.30	mm	2.00mm Box Header, Molex Type PCB Surface Mount Type, Dual Rows
.XX	±0.20	比例/Scale	
.XXX	±0.10	Free	
		Size	料號/Part No: LBHM200T-XX
		A4	圖號/Drawing No: HD222202-002XX



鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.
TEL: (02) 8228-6487 FAX: (02) 8228-6486

核准/APPD. 7/6	審核/CHKD. Joe	製圖/DR. Mandy	報數/Sheet 1 of 1	REV. A0
--------------	--------------	--------------	-----------------	---------