

RoHS

SPECIFICATIONS

MATERIAL AND FINISH




- . Housing: PBT, UL94V-0, Color-Black.
- . Terminal: Sq 0.64mm, Brass, Gold Plating.

ELECTRICAL CHARACTERISTICS


- . Current Rating: 3 Amp. Max.
- . Dielectric Withstanding Voltage: 1000V AC RMS for 60 Seconds.
- . Insulator Resistance: 1000M Ohms Min at 1000V DC.

MECHANICAL CHARACTERISTICS

- . Operation Temperature: -55°C to +150°C.

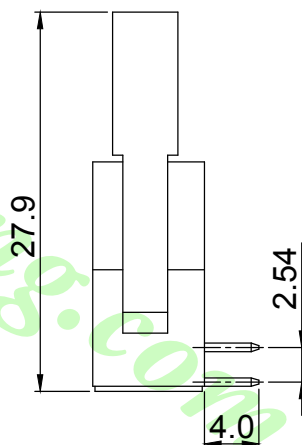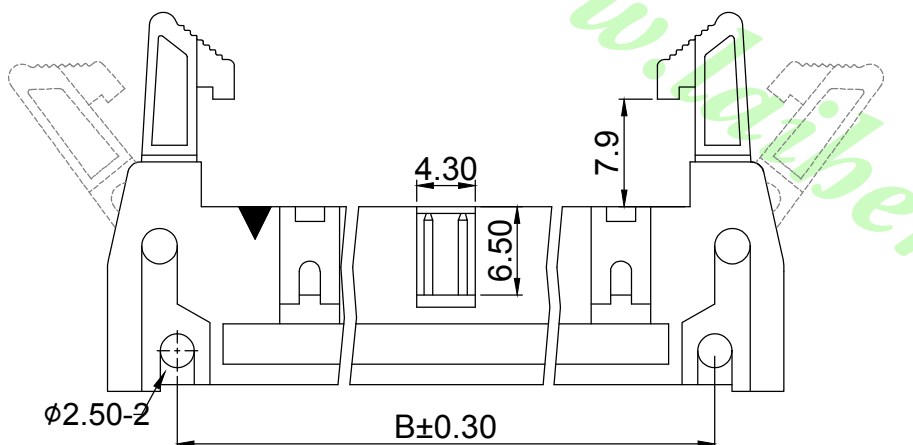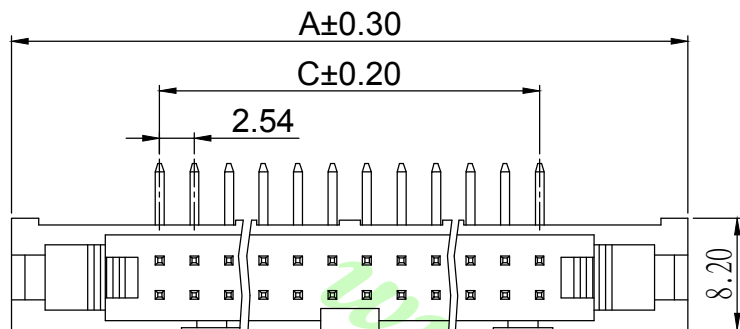

Dimensions			
Pos.	A	B	C
10	32.00	21.84	10.16
12	34.54	24.38	12.70
14	37.08	26.92	15.24
16	39.62	29.46	17.78
20	44.70	34.54	22.86
24	49.78	39.62	27.94
26	52.32	42.16	30.48
30	57.40	47.24	35.56
34	62.48	52.32	40.64
40	70.10	59.94	48.26
50	82.80	72.64	60.96

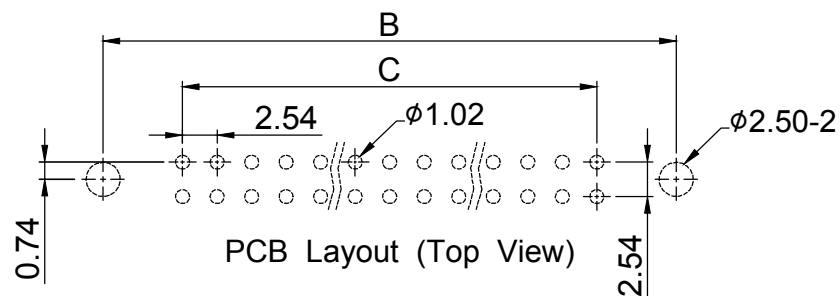

Part No.
LBHE 254 R - XX
 No. of Contacts (10~50)
 R: Right Angle Type
 2.54mm Pitch

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.54mm Box Header Ejector Type PCB Mount Right Angle With Latch	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2019.03.21	.X ±0.30 .XX ±0.20 .XXX ±0.10	料號/Part No : LBHE254R-XX	
REV	概述/REVISION	日期/DATE	比例/Scale Free	圖號/Drawing No : HD2206012-002XX	核加/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0