
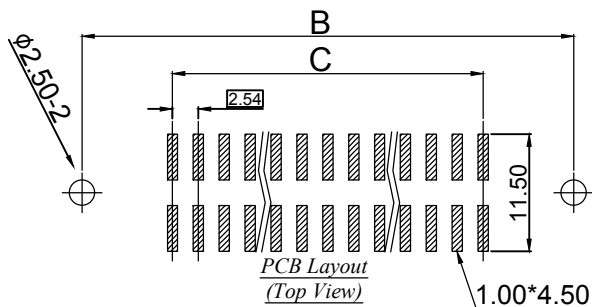
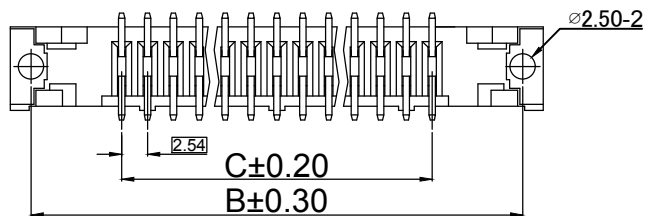

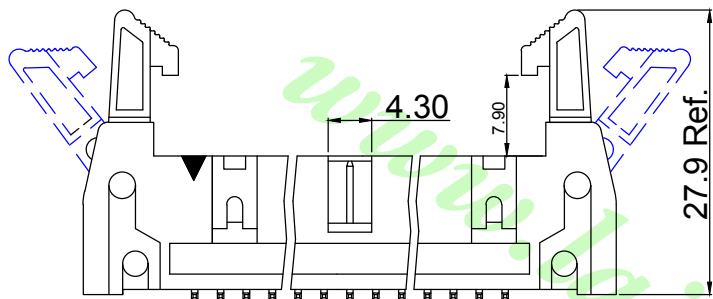


RoHS

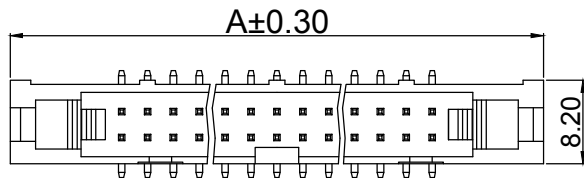

## SPECIFICATIONS

### MATERIAL AND FINISH

- . Housing: Nylon 6T, UL94V-0, Color-Black.
- . Terminal: Sq 0.64mm, Brass, Gold Plating.

### ELECTRICAL CHARACTERISTICS

- . Current Rating: 3 Amp. Max.
- . Dielectric Withstanding Voltage: 1000V AC RMS for 60 Seconds.
- . Insulator Resistance: 1000M Ohms Min at 1000V DC.

### MECHANICAL CHARACTERISTICS

- . Operation Temperature: -55°C to +150°C.

Order Information	Dimensions			
	Pos.	A	B	C
LBHE254T-10	10	32.00	27.94	10.16
LBHE254T-14	14	37.08	33.02	15.24
LBHE254T-16	16	39.62	35.56	17.78
LBHE254T-20	20	44.70	40.64	22.86
LBHE254T-26	26	52.32	48.26	30.48
LBHE254T-34	34	62.48	58.42	40.64
LBHE254T-40	40	70.10	66.04	48.26
LBHE254T-50	50	82.80	78.74	60.96

**Part No.**

LBHE 254 T - XX

No. of Contacts (10~50)  
T: SMT Type  
2.54mm Pitch

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit	品名/Title :
.X	±0.30	mm	Free	2.54mm Box Header Ejector PCB Surface Mount
.XX	±0.20	mm	Free	Type with Latch
.XXX	±0.10	mm	Size A4	料號/Part No : LBHE254T-XX
A0	NEW DRAWING	2019.03.21		圖號/Drawing No : HD2208012-002XX
REV	概述/REVISION	日期/DATE		

**鍊亨電子有限公司**  
LAI HENG TECHNOLOGY LTD.  
TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0