
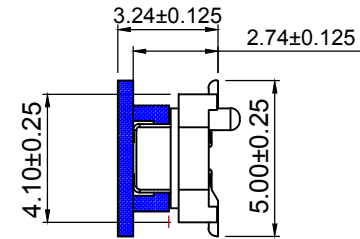




RoHS

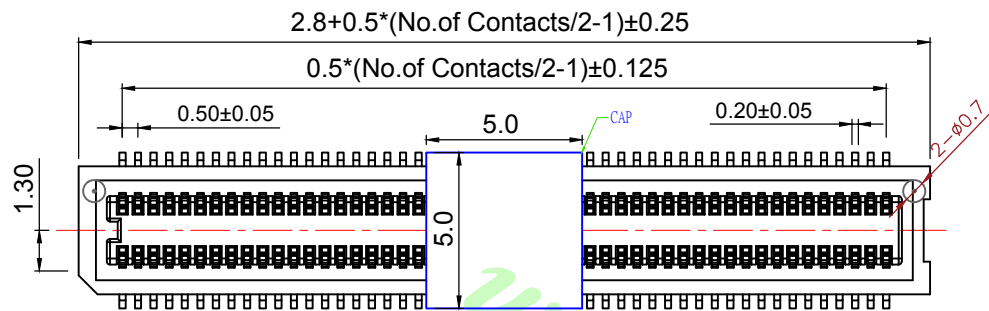


NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature:-55 to +125°
- C. Electrical:
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

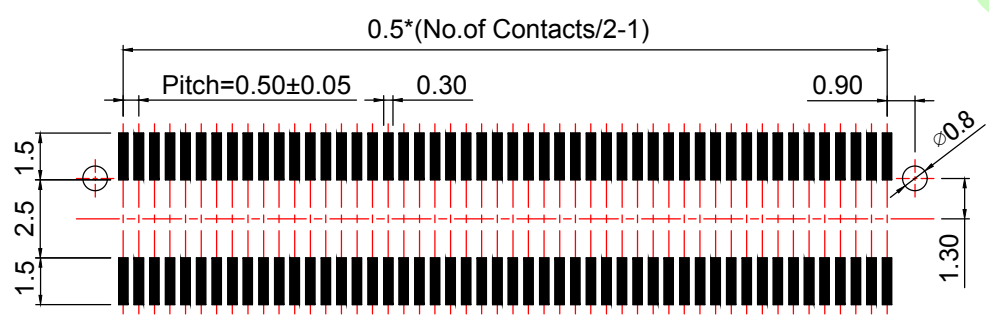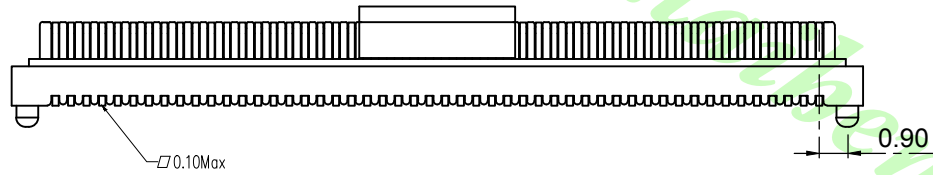

PCB Layout For Surface Mounting

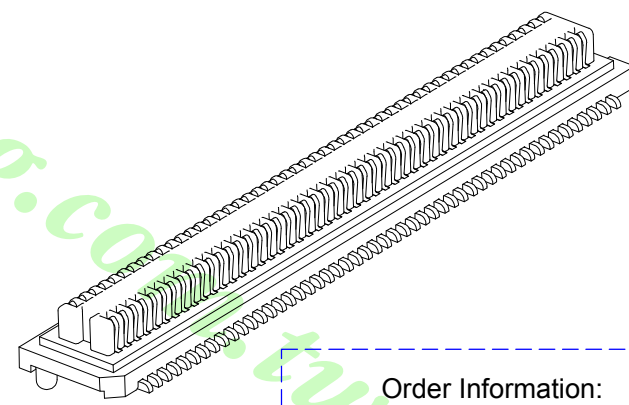

Order Information:

LBTB-05M B XXX C1

BTB Connector | Pitch 0.5mm Male | Insulation: B:Height: 2.74mm Width: 4.10mm | NO. of contacts:(020~100) | C1:CAP

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :
			比例/Scale	0.50mm(0.0197") Pitch Board To Board Male Connector H=2.74mm
A0	NEW DRAWING	2019.08.20	Free	料號/Part No :
REV	概述/REVISION	日期/DATE	Size A4	LBTB-05MBXXX C1
			圖號/Drawing No :	BTB-05M-BXXX-C1

鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.
TEL:(02) 8228-6487 FAX:(02) 8228-6486

核准/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0