



RoHS

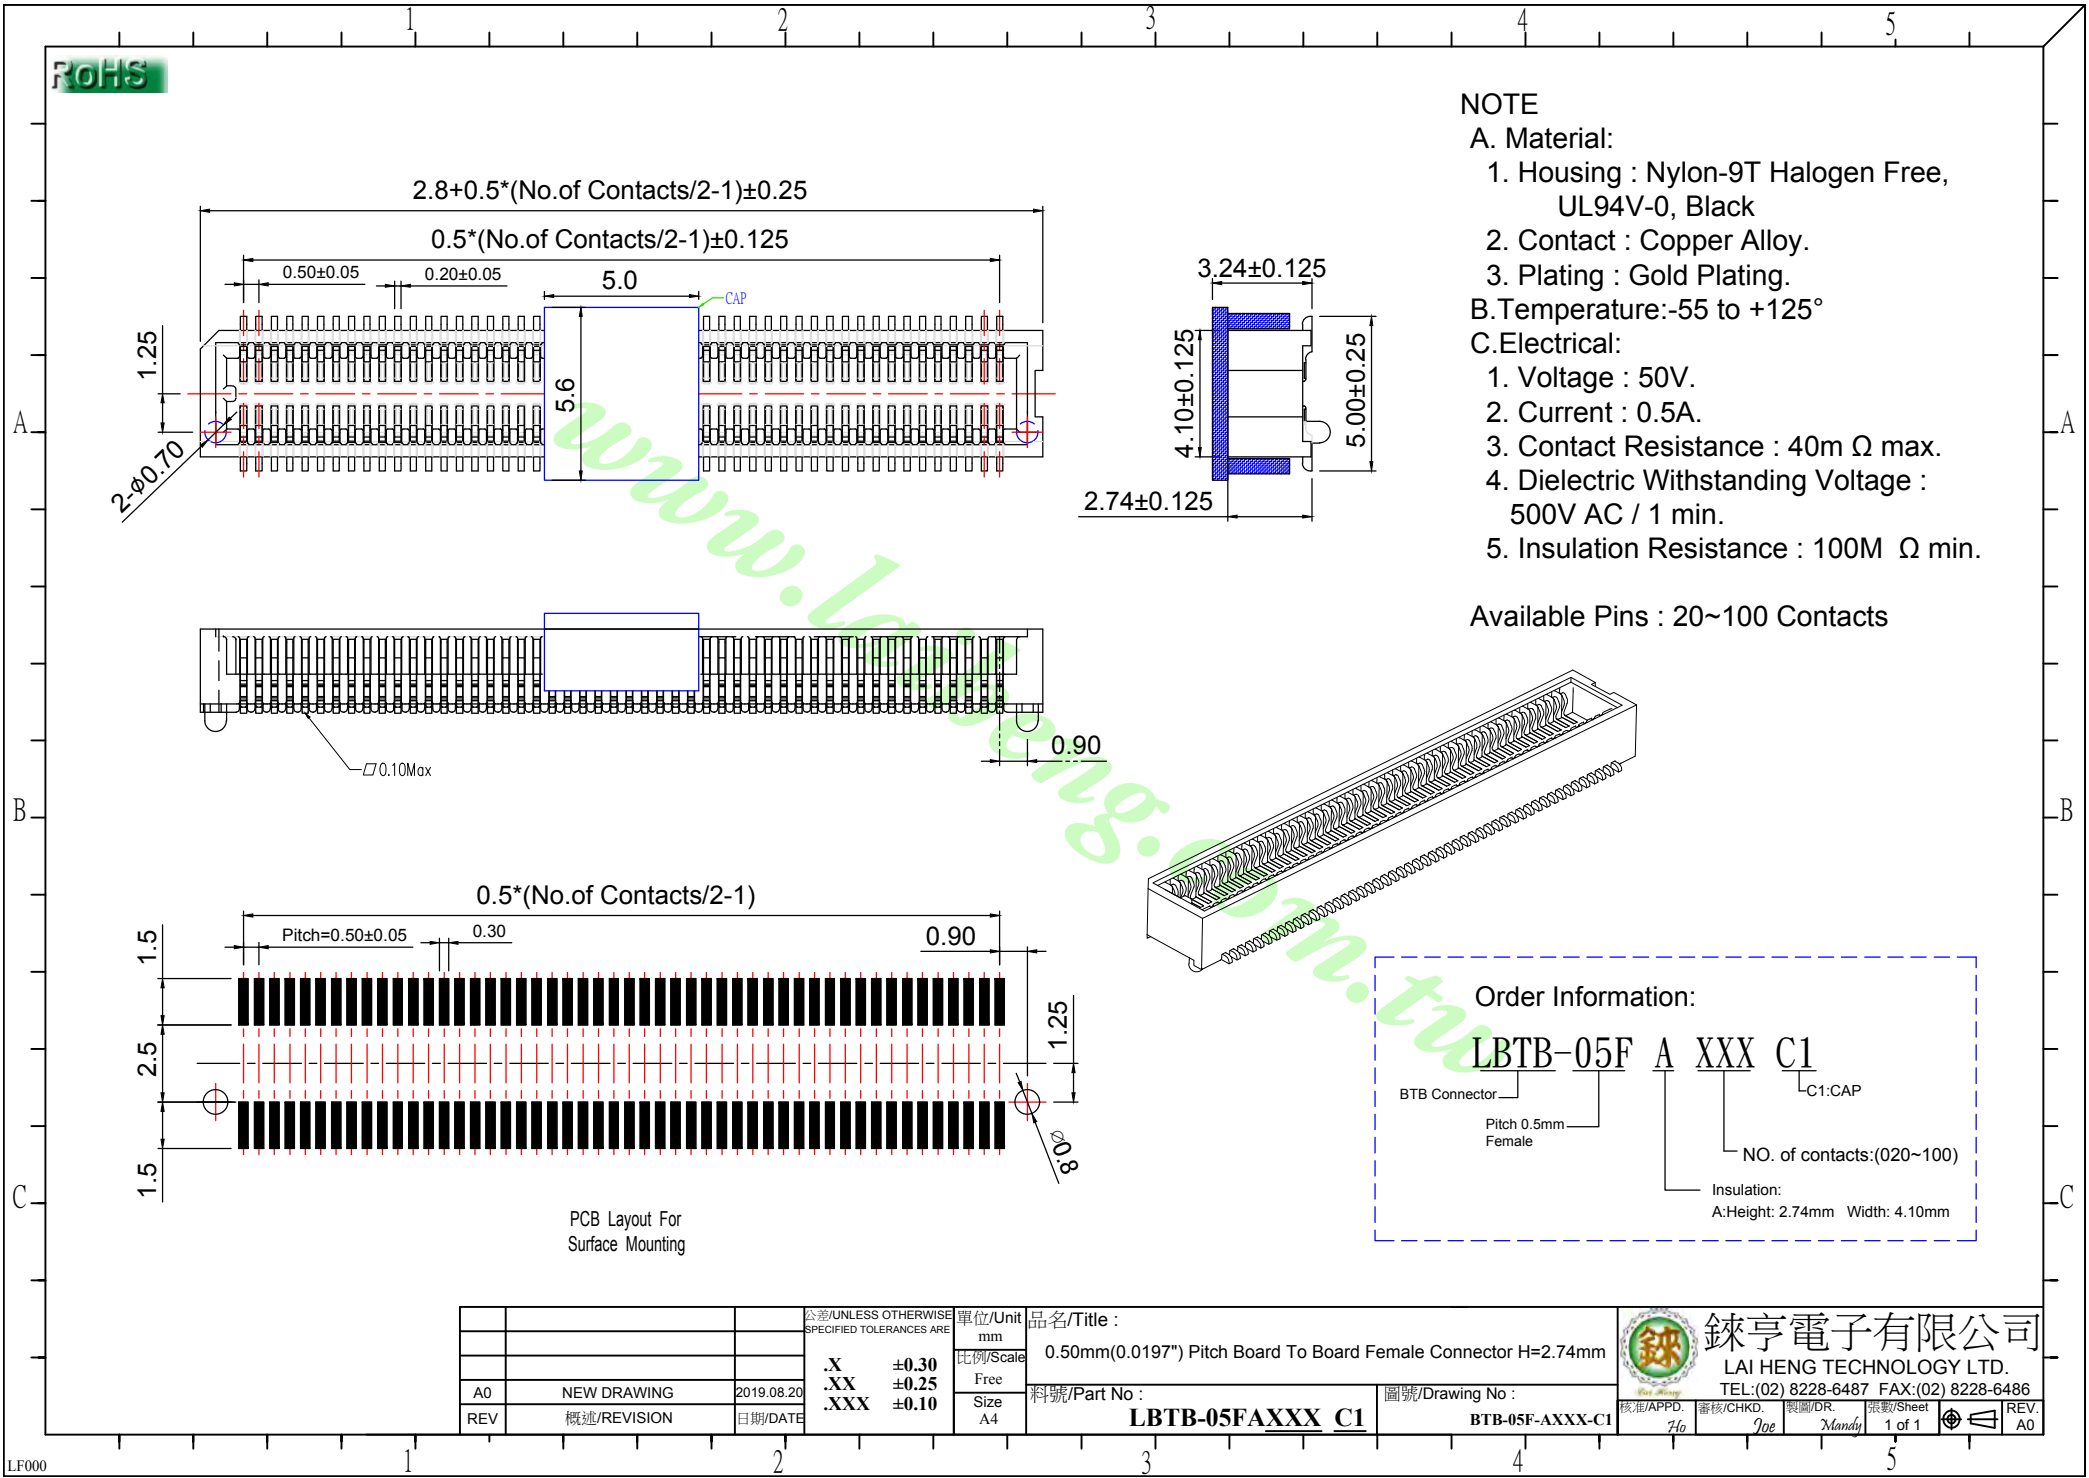

NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

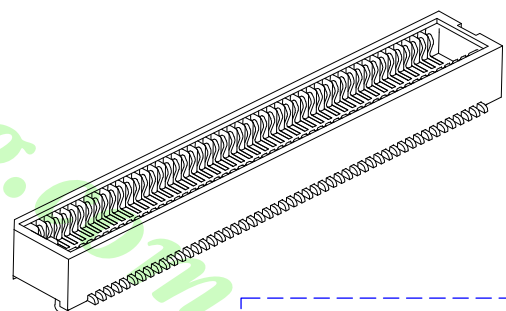

Order Information:

LBTB-05F A XXX C1

- BTB Connector
- Pitch 0.5mm Female
- NO. of contacts: (020~100)
- Insulation: A: Height: 2.74mm Width: 4.10mm
- C1: CAP


公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 0.50mm(0.0197") Pitch Board To Board Female Connector H=2.74mm
.X	±0.30	比例/Scale	Free	料號/Part No : LBTB-05FAXXX C1
.XX	±0.25	Size	A4	圖號/Drawing No : BTB-05F-AXXX-C1
.XXX	±0.10			
A0	NEW DRAWING	2019.08.20		
REV	概述/REVISION	日期/DATE		

鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.
TEL:(02) 8228-6487 FAX:(02) 8228-6486

核准/APPD. 7/4 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0


RoHS

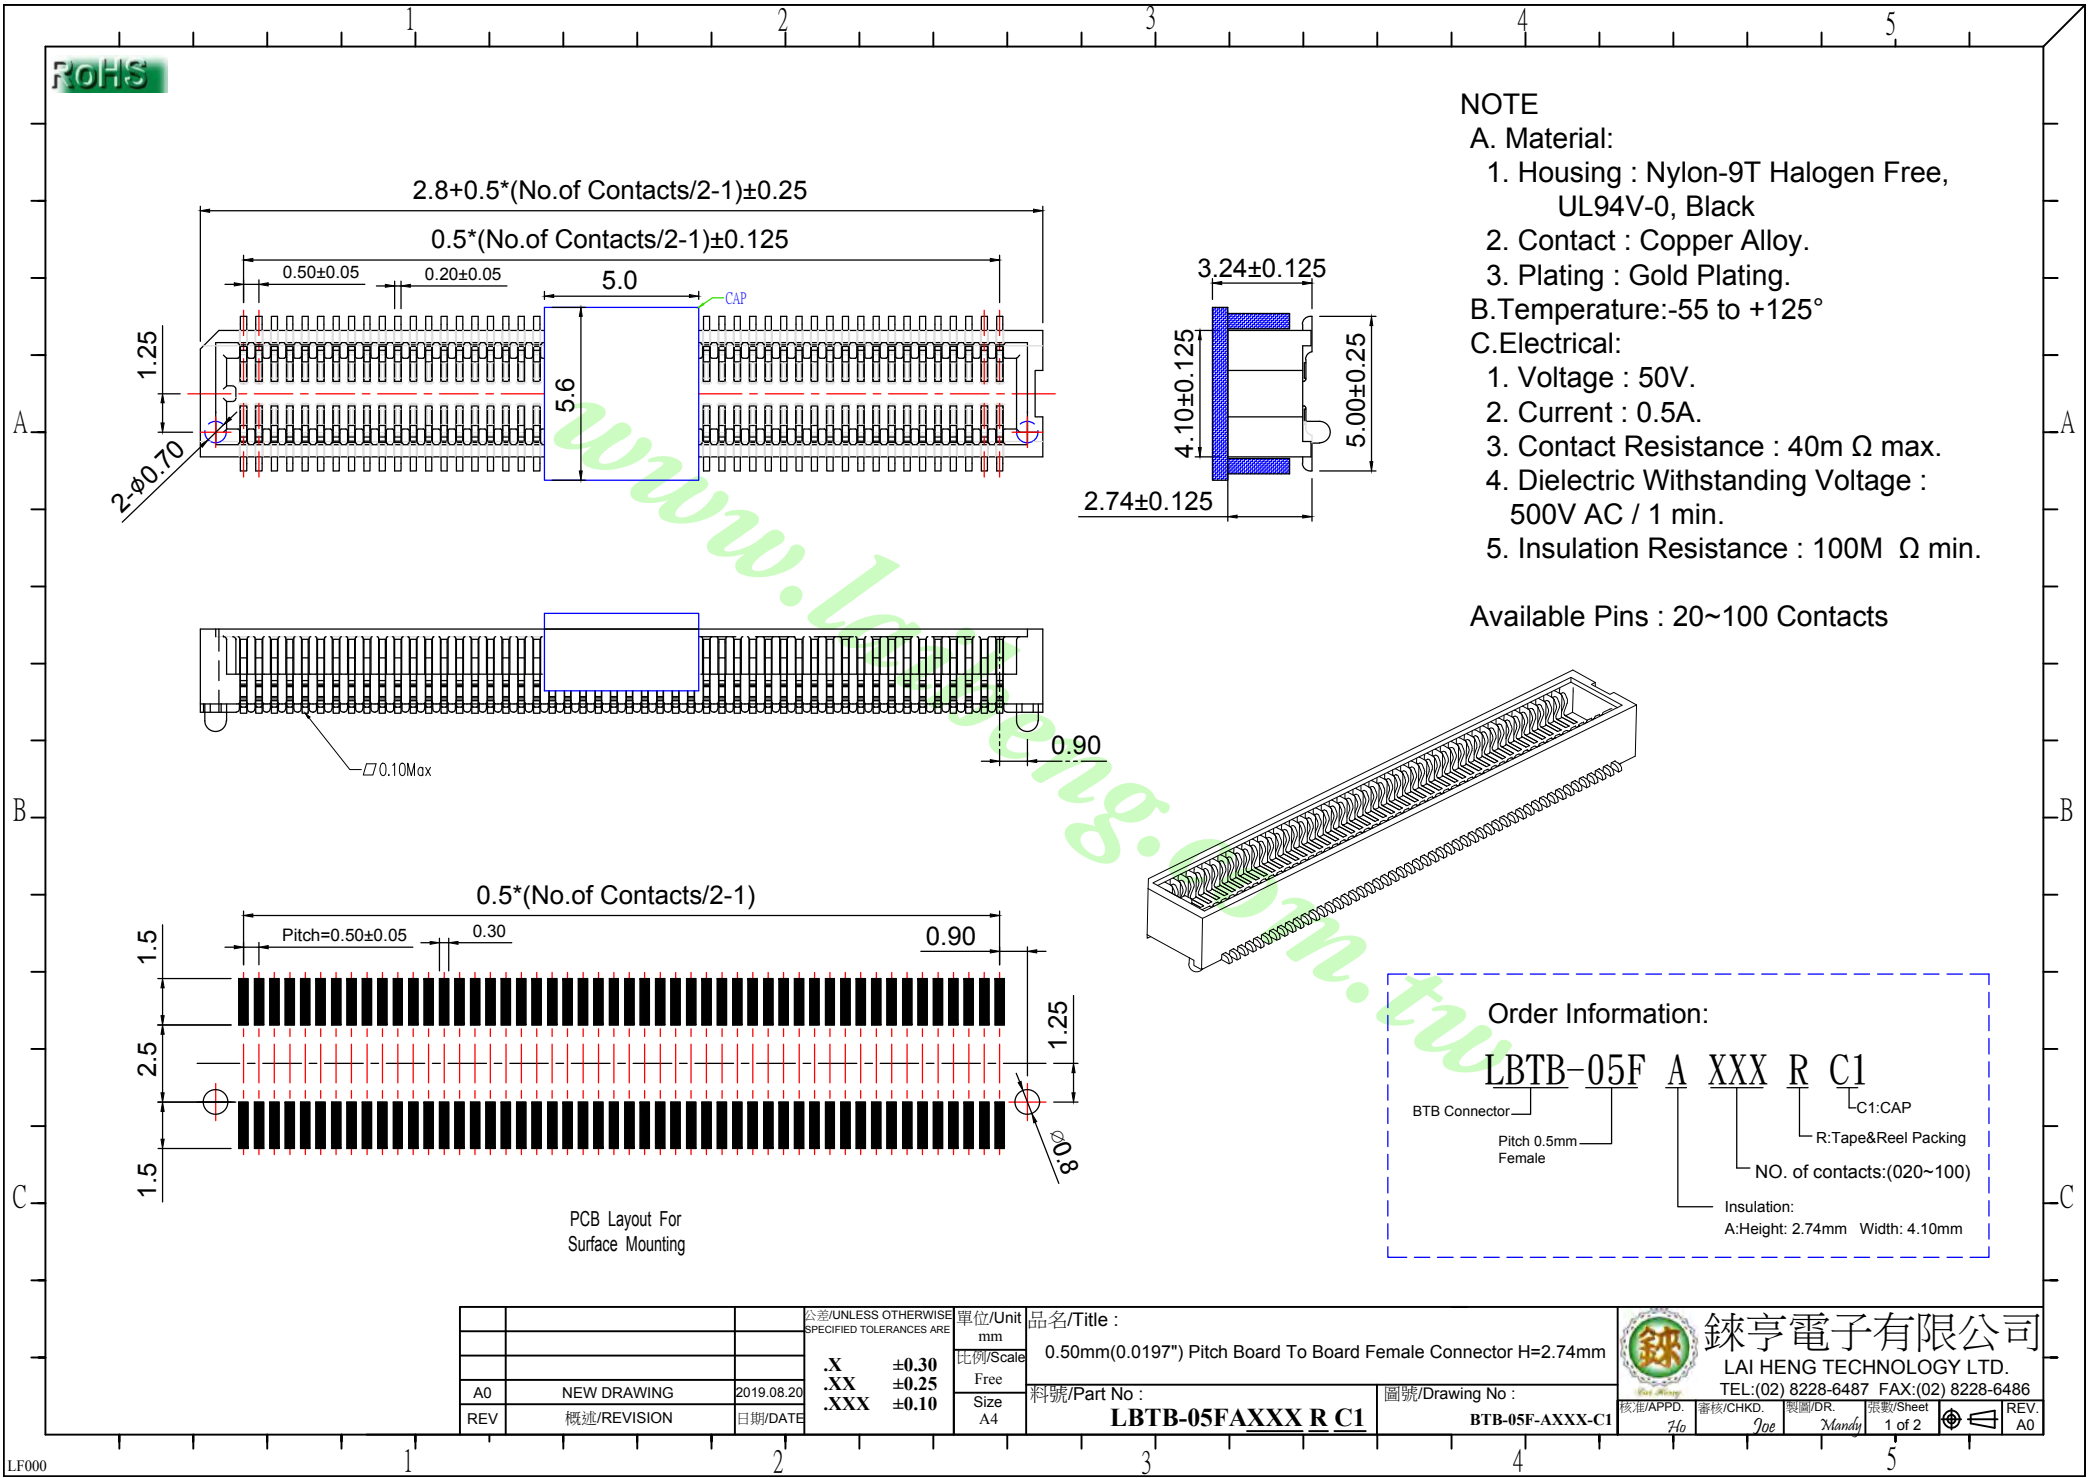

NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

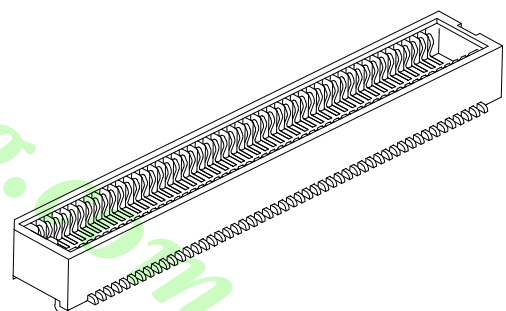

Order Information:

LBTB-05F A XXX R C1

BTB Connector

Pitch 0.5mm Female

C1: CAP

R: Tape&Reel Packing

NO. of contacts: (020~100)

Insulation:
 A: Height: 2.74mm Width: 4.10mm


公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 0.50mm(0.0197") Pitch Board To Board Female Connector H=2.74mm
.X ±0.30			比例/Scale Free	料號/Part No : LBTB-05FAXXX R C1
.XX ±0.25			Size A4	
.XXX ±0.10				圖號/Drawing No : BTB-05F-AXXX-C1
A0	NEW DRAWING	2019.08.20		
REV	概述/REVISION	日期/DATE		

鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486


核准/APPD. 7/4 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 2

REV. A0


RoHS

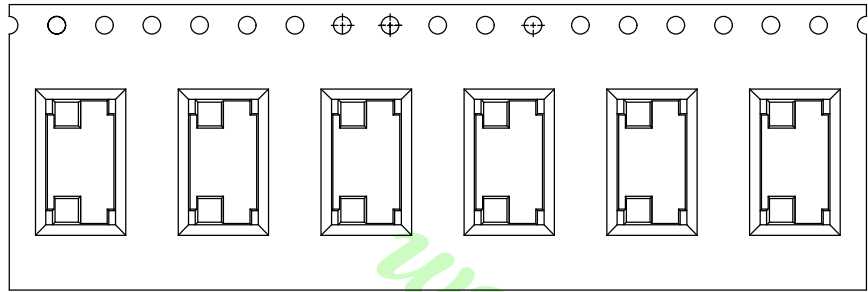

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1mm in 250mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-2A requirements.
6. Material: Black Conductive Polystyrene.
 Thickness: $0.35 \pm 0.05 \text{ mm}$.
 Packing length per 22" reel : 46 Meters.
 Component loader per 13" reel : 1200 pcs.



出料方向

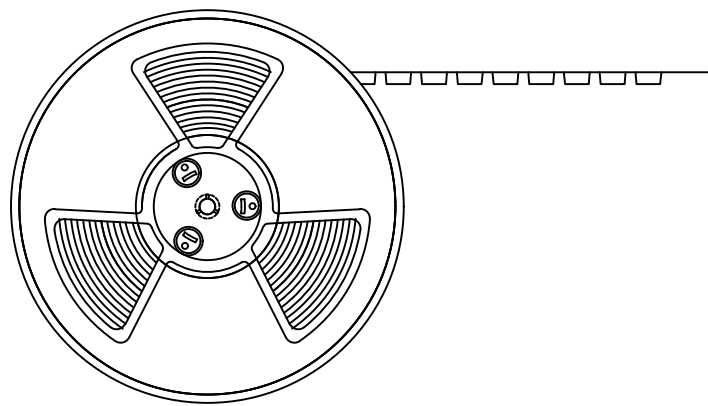

Order Information:

LBTB-05F A XXX R C1

BTB Connector ———— Pitch 0.5mm Female ———— C1:CAP
 R:Tape&Reel Packing
 NO. of contacts:(020~100)
 Insulation:
 A:Height: 2.74mm Width: 4.10mm

		公意/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :	鍊亨電子有限公司	
				比例/Scale	0.50mm(0.0197") Pitch Board To Board Female Connector Carrier	LAI HENG TECHNOLOGY LTD.	
A0	NEW DRAWING	2019.08.20	.X ± 0.30	Free	料號/Part No :	圖號/Drawing No :	TEL:(02) 8228-6487 FAX:(02) 8228-6486
REV	概述/REVISION	日期/DATE	.XX ± 0.25	Size A4	LBTB-05FAXXX R C1	BTB-05F-RC1	製圖/DR. 2 of 2
		.XXX ± 0.10					審核/CHKD. 740 Joe Mandy