
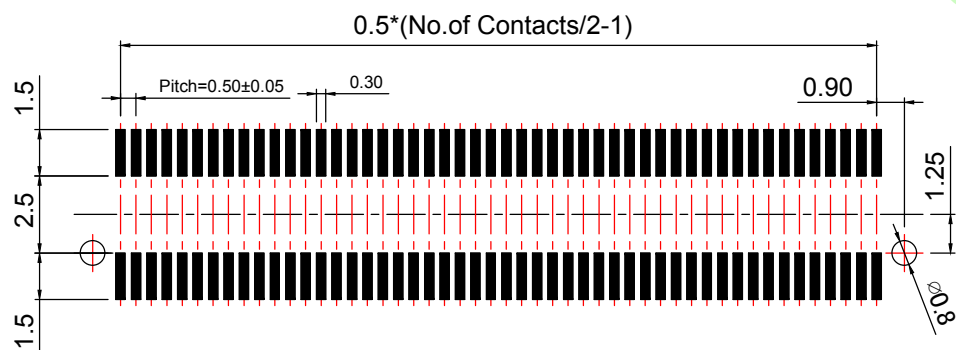
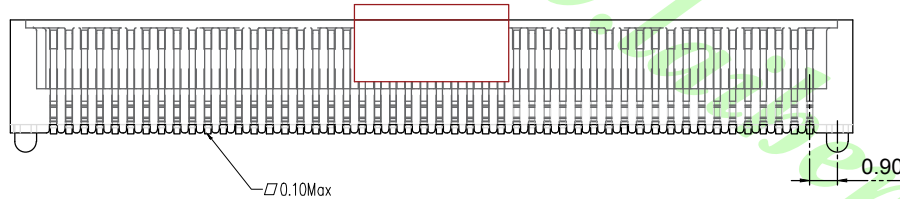



RoHS

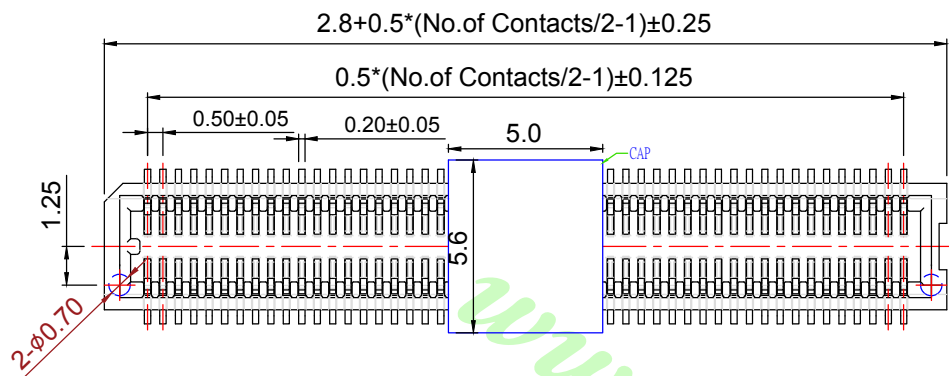


PCB Layout For Surface Mounting

NOTE

- A. Material:
  1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
  2. Contact : Copper Alloy.
  3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
  1. Voltage : 50V.
  2. Current : 0.5A.
  3. Contact Resistance : 40m Ω max.
  4. Dielectric Withstanding Voltage : 500V AC / 1 min.
  5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

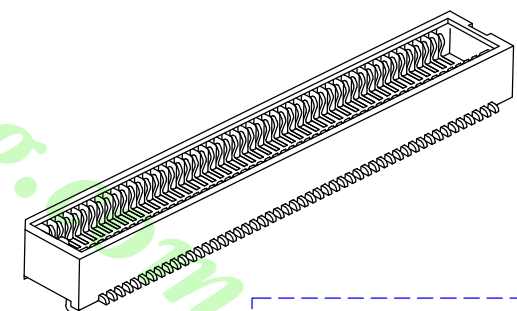

Order Information:

**LBTB-05F B XXX C1**

BTB Connector

Pitch 0.5mm Female

C1:CAP

NO. of contacts:(020~100)

Insulation:  
B:Height: 3.70mm Width: 4.10mm

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名/Title :	LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486					
			.X ±0.30	比例/Scale	0.50mm(0.0197") Pitch Board To Board Female Connector H=3.70mm						
A0	NEW DRAWING	2019.08.20	.XX ±0.25	Free	料號/Part No :	圖號/Drawing No :	核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
REV	概述/REVISION	日期/DATE	.XXX ±0.10	Size A4	<b>LBTB-05FB XXX C1</b>	<b>BTB-05F-BXXX-C1</b>	Joe	Joe	Mandy	1 of 1	A0