

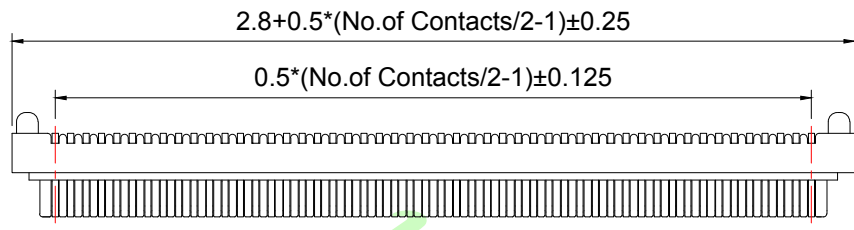




RoHS

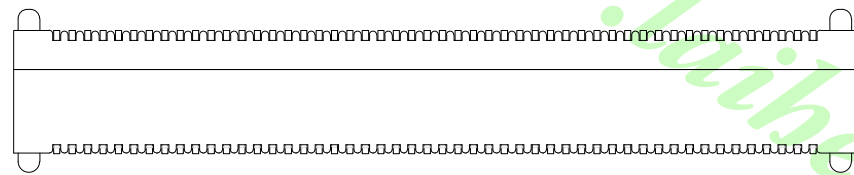

Part No: LBTB-05MB xxx C1




Part No:LBTB-05FA xxx C1



NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
  2. Contact : Copper Alloy.
  3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
1. Voltage : 50V.
  2. Current : 0.5A.
  3. Contact Resistance : 40m Ω max.
  4. Dielectric Withstanding Voltage : 500V AC / 1 min.
  5. Insulation Resistance : 100M Ω min.



Available Pins : 20~100 Contacts

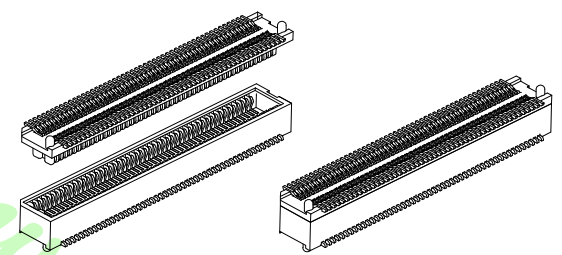

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :	0.50mm(0.0197") Pitch Board To Board Connector Male+Female H=4.00mm		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486				
		.X	±0.30	比例/Scale	料號/Part No :					圖號/Drawing No :		
A0	NEW DRAWING	2019.08.20	.XX	±0.25	Free			核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
REV	概述/REVISION	日期/DATE	.XXX	±0.10	Size A4			740	Joe	Mandy	1 of 3	A0

BTB-0540



RoHS

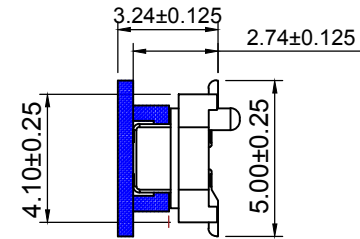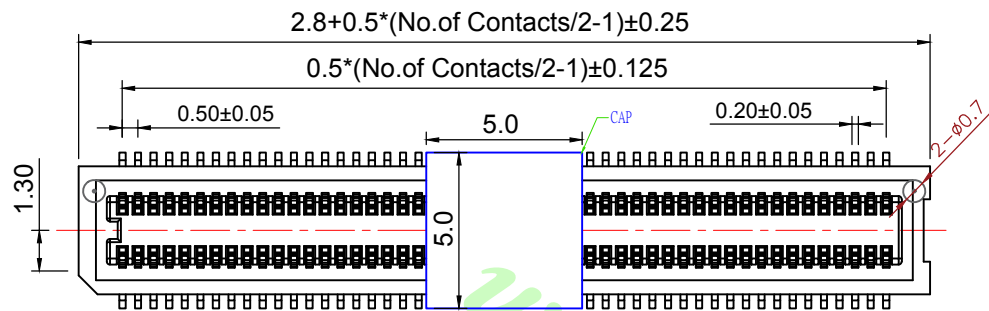


NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
  2. Contact : Copper Alloy.
  3. Plating : Gold Plating.
- B. Temperature:-55 to +125°
- C. Electrical:
1. Voltage : 50V.
  2. Current : 0.5A.
  3. Contact Resistance : 40m Ω max.
  4. Dielectric Withstanding Voltage : 500V AC / 1 min.
  5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

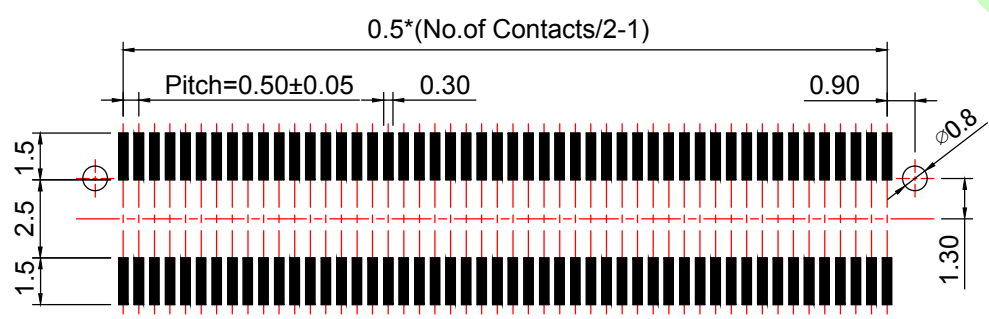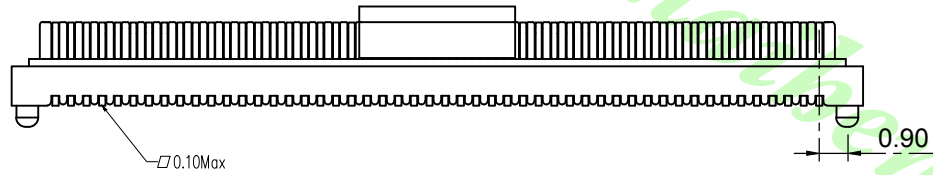

PCB Layout For Surface Mounting

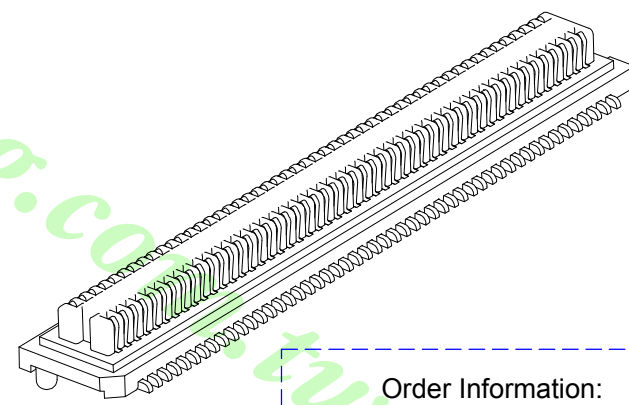

Order Information:

**LBTB-05M B XXX C1**

BTB Connector | Pitch 0.5mm Male | NO. of contacts:(020~100) | Insulation: B:Height: 2.74mm Width: 4.10mm





公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :
			比例/Scale	0.50mm(0.0197") Pitch Board To Board Male Connector H=2.74mm
A0	NEW DRAWING	2019.08.20	Free	料號/Part No :
REV	概述/REVISION	日期/DATE	Size A4	<b>LBTB-05MBXXX C1</b>
				圖號/Drawing No :
				<b>BTB-05M-BXXX-C1</b>

**鍊亨電子有限公司**  
LAI HENG TECHNOLOGY LTD.  
TEL:(02) 8228-6487 FAX:(02) 8228-6486

核准/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 2 of 3

REV. A0

RoHS

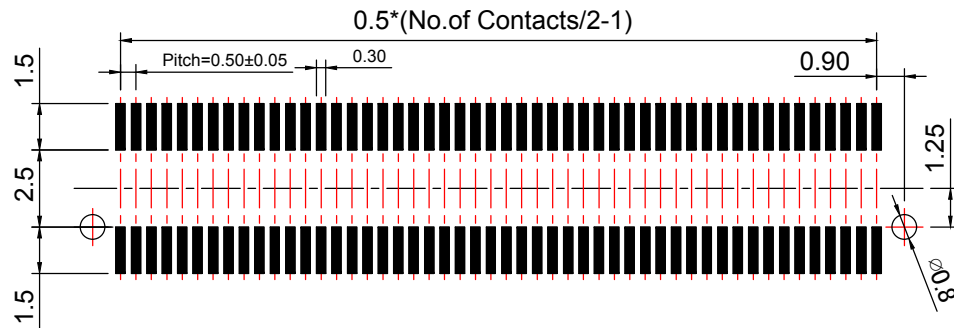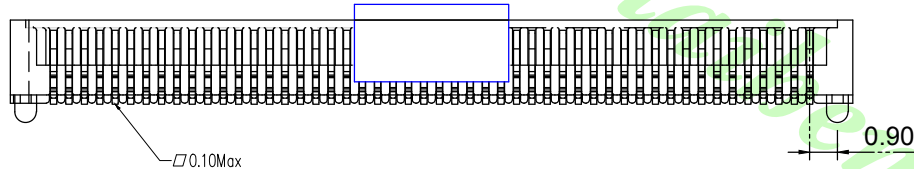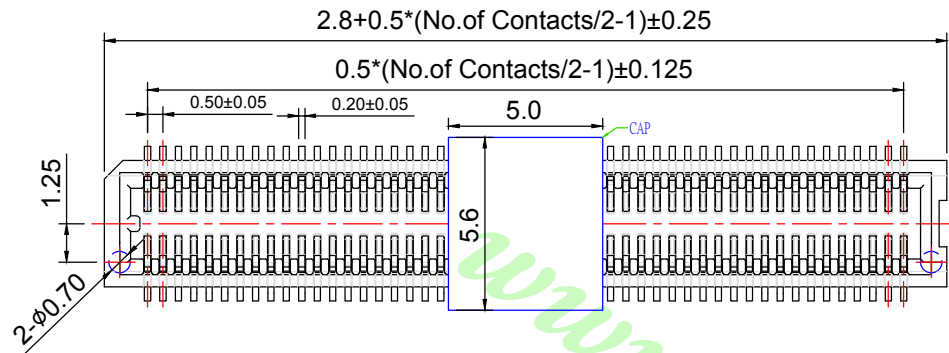


PCB Layout For Surface Mounting

NOTE

- A. Material:
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
  2. Contact : Copper Alloy.
  3. Plating : Gold Plating.
- B. Temperature: -55 to +125°
- C. Electrical:
1. Voltage : 50V.
  2. Current : 0.5A.
  3. Contact Resistance : 40m Ω max.
  4. Dielectric Withstanding Voltage : 500V AC / 1 min.
  5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

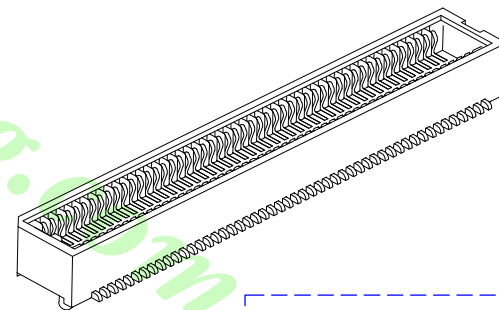

Order Information:

**LBTB-05F A XXX C1**

BTB Connector

Pitch 0.5mm Female

NO. of contacts:(020~100)

Insulation:  
A:Height: 2.74mm Width: 4.10mm

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486				
.X ±0.30			比例/Scale	0.50mm(0.0197") Pitch Board To Board Female Connector H=2.74mm	REV. A0				
.XX ±0.25			Free	料號/Part No :	LBTB-05FAXXX C1				
.XXX ±0.10			Size A4	圖號/Drawing No :	BTB-05F-AXXX-C1				
A0	NEW DRAWING	2019.08.20			核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
REV	概述/REVISION	日期/DATE			740	Joe	Mandy	3 of 3	A0