

SPECIFICATIONS

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 100V AC max.

Operating Temp: -25°C ~ +85°C

Insulation Resistance: 1000MΩ min.


Dielectric Withstanding Voltage: 800V AC min.

Contact Resistance: 20mΩ max.

Material

Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)		Part No.
	A	B	
02	2.0(0.079)	5.8(0.228)	LH-PH200-02
03	4.0(0.157)	7.8(0.307)	LH-PH200-03
04	6.0(0.236)	9.8(0.386)	LH-PH200-04
05	8.0(0.315)	11.8(0.465)	LH-PH200-05
06	10.0(0.394)	13.8(0.543)	LH-PH200-06
07	12.0(0.472)	15.8(0.622)	LH-PH200-07
08	14.0(0.551)	17.8(0.701)	LH-PH200-08
09	16.0(0.630)	19.8(0.780)	LH-PH200-09
10	18.0(0.709)	21.8(0.858)	LH-PH200-10
11	20.0(0.787)	23.8(0.937)	LH-PH200-11
12	22.0(0.886)	25.8(1.016)	LH-PH200-12
13	24.0(0.945)	27.8(1.094)	LH-PH200-13
14	26.0(1.024)	29.8(1.173)	LH-PH200-14
15	28.0(1.102)	31.8(1.252)	LH-PH200-15
16	30.0(1.181)	33.8(1.331)	LH-PH200-16

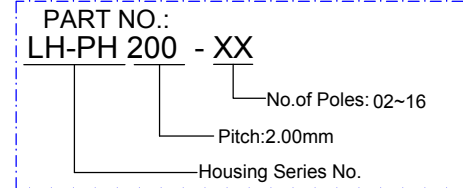

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名(Title):	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
			X.XX ±0.2 X.X ±0.3	比例/Scale Free	2.0mm Wire-to-Board Housing		
A0	NEW DRAWING	2018.08.16		Size A4	料號/Part No:	圖號/Drawing No:	核對/APPD. Joe
REV	概述/REVISION	日期/DATE			LH-PH200-XX	2000J-XX	製圖/DR. Mandy
							報數/Sheet 1 of 1
							REV. A0