


SPECIFICATIONS

Current rating : 2A AC,DC
 Voltage rating : 250V AC,DC
 Temperature range : -25°C to +85 °C
 Contact resistance : 20mΩ Max.
 Insulation resistance : 1000MΩ Min.
 Withstanding voltage : 800V AC/minute
 Material : Nylon 66, UL94V-2

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.
	A	B	
02	2.50	6.00	LH-DP250-02
03	5.00	8.50	LH-DP250-03
04	7.50	11.00	LH-DP250-04
05	10.00	13.50	LH-DP250-05
06	12.50	16.00	LH-DP250-06
07	15.00	18.50	LH-DP250-07
08	17.50	21.00	LH-DP250-08
09	20.00	23.50	LH-DP250-09
10	22.50	26.00	LH-DP250-10

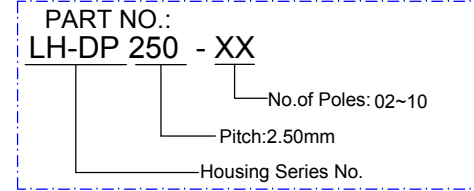

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名(Title) : 2.5mm Wire-to-Board Housing	銖亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
A0	NEW DRAWING	2018.08.16	X.XX ±0.2 X.X ±0.3	比例/Scale Free	料號/Part No : LH-DP250-XX		圖號/Drawing No : 2500-XX
REV	概述/REVISION	日期/DATE		Size A4			核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0