
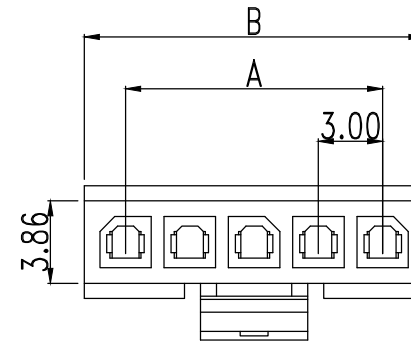


Features:

- Available in 2 thru 12 circuits
- Material: UL 94V-0 nylon 66
- Accepts LT-MF300_F_ terminal
- Mates with LH-MF300F-XX housing
- Standard color: Black

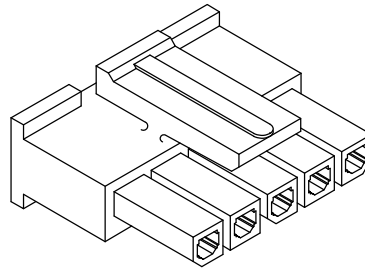




Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A


- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

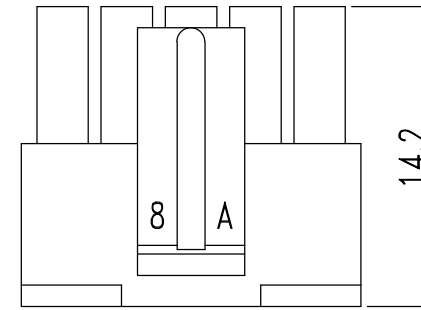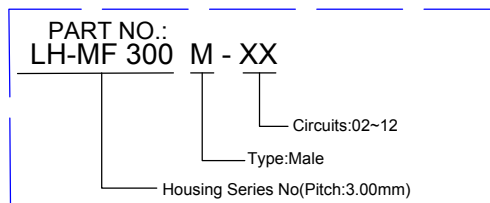

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	7.0	4	9.0	13.0	6	15.0	19.0	8	21.0	25.0	10	27.0	31.0	12	33.0	37.0
3	6.0	10.0	5	12.0	16.0	7	18.0	22.0	9	24.0	28.0	11	30.0	34.0			

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):		 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
		X.XXX ±0.08 X.XX ±0.25 X.X ±0.4		比例/Scale Free	.118" (3.0mm) Single Row Receptacle Housing (Male)		
A0	NEW DRAWING	2018.08.20		Size A4	料號/Part No: LH-MF300M-XX		圖號/Drawing No: 30002HM-N
REV	概述/REVISION	日期/DATE					核對/APPD: <i>Zho</i> 審核/CHKD: <i>Joe</i> 製圖/DR: <i>Mandy</i> 張數/Sheet: 1 of 1 1 of 1 REV. A0