

Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon 66
- Accepts LT-MF300_F_terminal
- Mates with LH-MF300F-2xXX housing
- Standard color: Black


Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A



- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

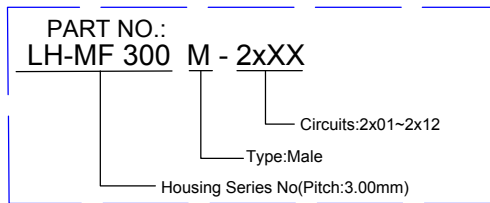

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		4.0	6	6.0	10.0	10	12.0	16.0	14	18.0	22.0	18	24.0	28.0	22	30.0	34.0
4	3.0	7.0	8	9.0	13.0	12	15.0	19.0	16	21.0	25.0	20	27.0	31.0	24	33.0	37.0

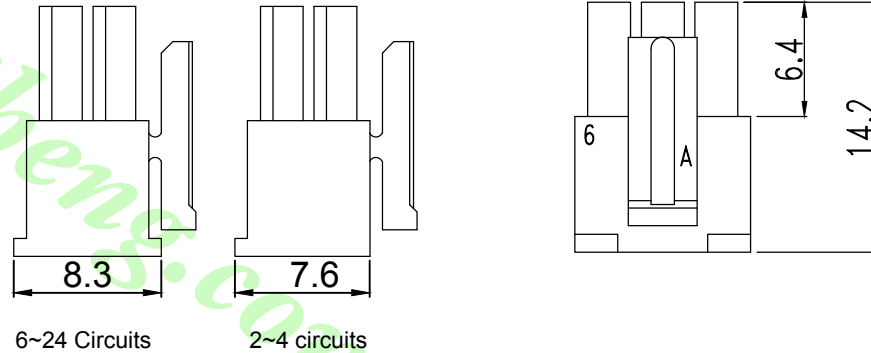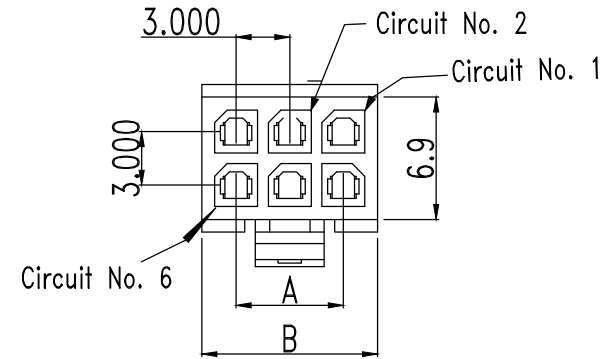

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit	品名(Title):		銖亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
		X.XXX ±0.08		mm	.118"(3.0mm) Dual Row Receptacle Housing (Male)		
		X.XX ±0.25		Free	料號/Part No: LH-MF300M-2xXX		
		X.X ±0.4		A4	圖號/Drawing No: 30001HM-N		
A0	NEW DRAWING	2018.08.20					核對/APPD. Joe
REV	概述/REVISION	日期/DATE					審核/CHKD. Joe
							製圖/DR. Mandy
							張數/Sheet 1 of 1
							REV. A0