

### SPECIFICATIONS

Current Rating: 7A AC, DC

Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C


Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)		Part No.
	A	B	
2	3.96 (0.156)	8.04 (0.317)	LH-VH396-02
3	7.92 (0.312)	12.10 (0.476)	LH-VH396-03
4	11.88 (0.468)	15.96 (0.628)	LH-VH396-04
5	15.84 (0.624)	20.00 (0.787)	LH-VH396-05
6	19.80 (0.780)	23.90 (0.941)	LH-VH396-06
7	23.76 (0.935)	27.90 (1.098)	LH-VH396-07
8	27.72 (1.074)	31.86 (1.254)	LH-VH396-08
9	31.68 (1.247)	35.88 (1.413)	LH-VH396-09
10	35.64 (1.403)	39.84 (1.569)	LH-VH396-10
11	39.60 (1.559)	43.74 (1.722)	LH-VH396-11
12	43.56 (1.715)	47.74 (1.880)	LH-VH396-12
13	47.52 (1.871)	51.70 (2.035)	LH-VH396-13
14	51.48 (2.027)	55.66 (2.191)	LH-VH396-14

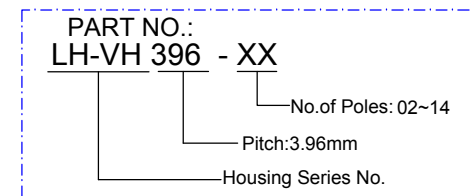

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名(Title):	<b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486		
			X.XX ±0.35 X.X ±0.5	比例/Scale Free	3.96mm Wire-to-Board Housing			
A0	NEW DRAWING	2018.08.16		Size A4	料號/Part No:	圖號/Drawing No:	核對/APPD. Joe	審核/CHKD. Joe
REV	概述/REVISION	日期/DATE			<b>LH-VH396-XX</b>	<b>3960VH-XX</b>	製圖/DR. Mandy	張數/Sheet 1 of 1