
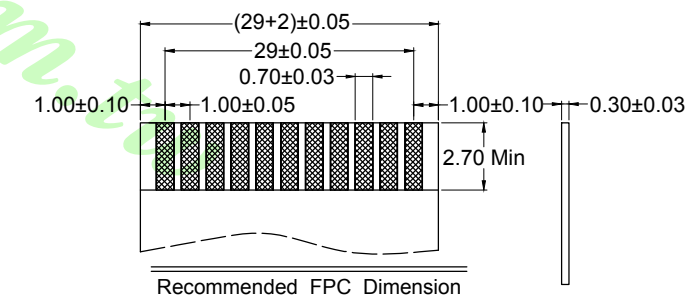


**Electrical Characteristics:**  
 Current rating: 1A AC/DC.  
 Voltage rating: 125V AC/DC.  
 Temperature range: -40°C ~ +85°C.  
 Withstand Voltage: 500V AC/Minute.  
 Contact Resistance: 20mΩ.  
 Insulation resistance: 100MΩ.  
 Relative Humidity: 90%~95%+40°C.

**Material Description:**  
 Contact: Phosphor Bronze, Tin-plated.  
 Housing: Nylon46, UL94V-0, Color: Natural.  
 Slider: PPS, UL94V-0, Color: Natural.



**30 PIN 专用**

		公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :
		.X ±0.35		比例/Scale	FPC1.0Pitch ZIF 抽屜立式 SMD 無LEG
		.XX ±0.20		Free	料號/Part No :
		ANG. ±3°		Size	LFPC-1020-30SL-MAX
A0	NEW DRAWING	2018.06.18			圖號/Drawing No :
REV	概述/REVISION	日期/DATE			

**鍊亨電子有限公司**  
 LAI HENG TECHNOLOGY LTD.  
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 740 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0