


Recommended FFC Dimension

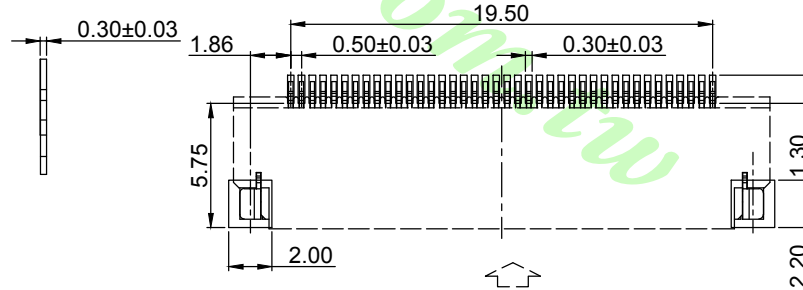

FPC/FFC Insert Direction
Recommended P.C.B Layout

Note:

1. Material

- 1.1: Housing: LCP, UL94-V0, Color: Natural.
- 1.2: Actuator: LCP, UL94-V0, Color: Black.
- 1.3: Contact: Phosphor Bronze.
- 1.4: LEG: Phosphor Bronze.

2. Plating


- 2.1: Contact: Matte Tin Or Gold Plating Nickel Overall.
- 2.2: LEG: Matte Tin Plating Over Nickel.

3. Rating

- 3.1: Current Rating: 0.4A AC/DC.
- 3.2: Voltage Rating: 50V AC/DC.
- 3.3: Temperature Range: -25°C ~ +85°C.

4. Part No:

LFPC 05 24-40 RL-TA X

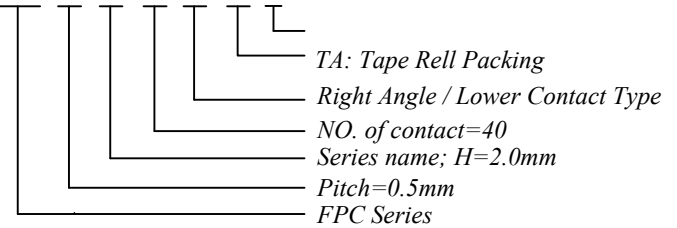

40PIN 专用

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
.X	±0.35	比例/Scale	Free	FPC 0.5Pitch 2.0H 掀蓋式 蝴蝶扣 SMD Type	
.XX	±0.20	料號/Part No :	Size A4	LFPC0524-40RL-TAG	圖號/Drawing No :
ANG.	±3°	REV			
A0	NEW DRAWING	2018.06.13			
REV	概述/REVISION	日期/DATE			
			核加/APPD. Joe	審核/CHKD. Joe	製圖/DR. Mandy
			張數/Sheet 1 of 1	REV. A0	