



ROHS

MATERIALS

HOUSING: HI-TEMP PLASTIC , COLOR:WHITE(UL 94V-0)
 SHELL: COPPER ALLOY OR SPCC, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA,
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -25°C~+85°C

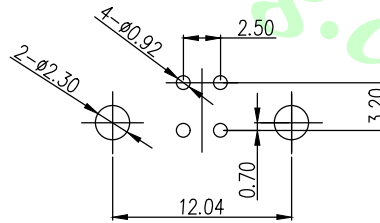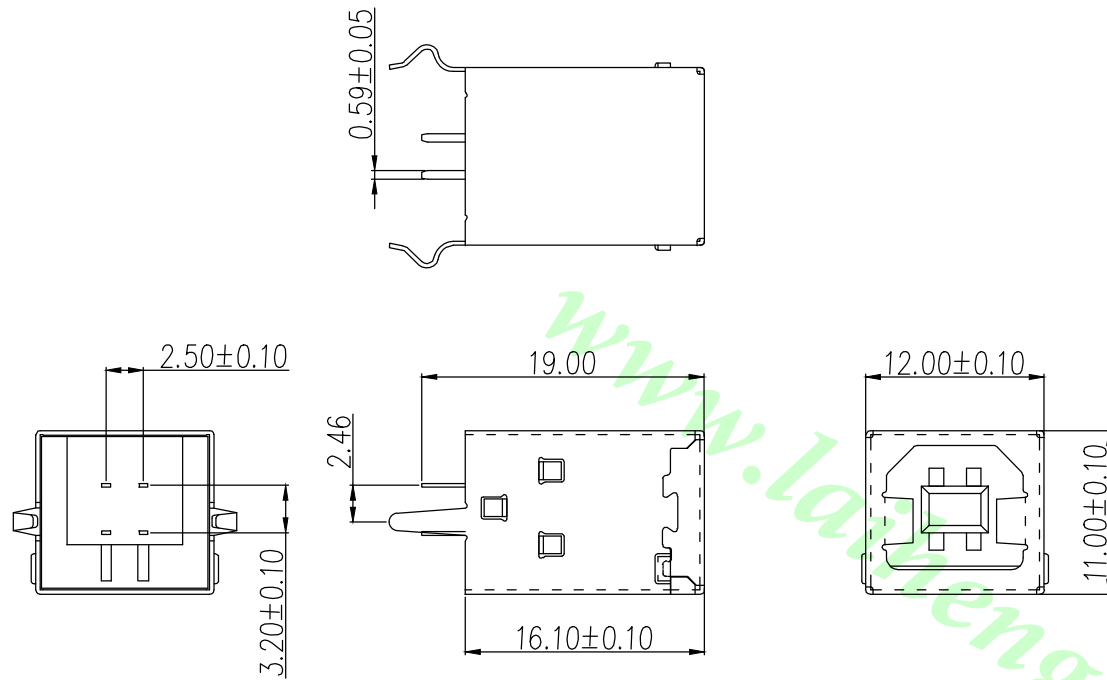

RECOMMENDED PCB LAYOUT

PART NUMBER

LUB-22BA 04 1 T 1 1 4 L 2

SERIES: LUB-22BA
 NO. OF POS.: 04
 CONTACT PLATED OPTION: 1 T
 TRAY PACKAGE: 1 1
 SHELL MATERIALS:
 1: COPPER ALLOY
 2: SPCC
 TIN PLATING ON SOLDER TAIL: 4 L 2

- CONTACT PLATED OPTION
- 1: GOLD FLASH
 - 2: 5u" GOLD
 - 3: 10u" GOLD
 - 4: 15u" GOLD
 - 6: 30u" GOLD

		公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title : USB B TYPE, PCB MOUNT, DIP, METAL SHIELD, FEMALE, VERTICAL (L=16.1)	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486			
				比例/Scale Free	料號/Part No : LUB-22BA041T114L2		圖號/Drawing No : 22AB-041T-114LX(22BA-005)		
A0	NEW DRAWING	2019.10.29	.X ±0.30	Size A4	審核/APPD. Joe	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
REV	概述/REVISION	日期/DATE	.XX ±0.20						
			.XXX ±0.10						
			ANG. ±3°						