
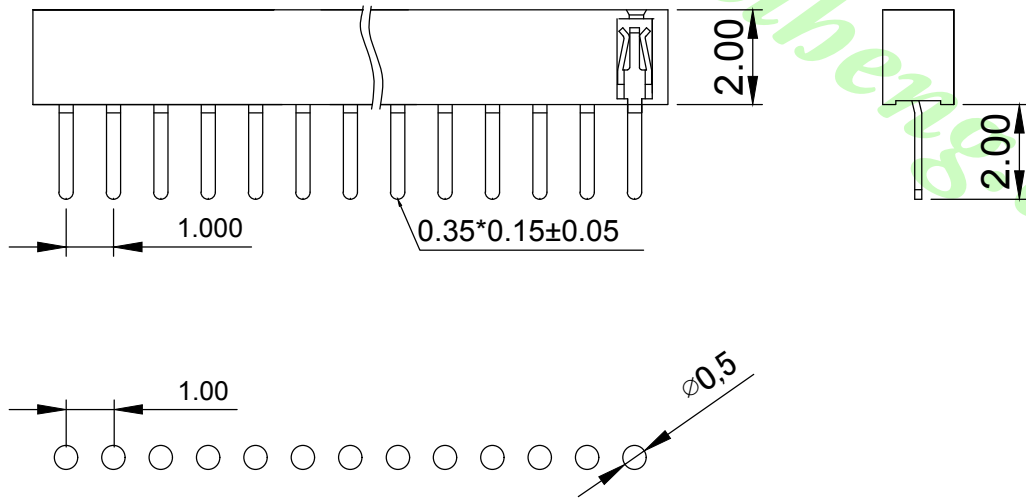


RoHS

### Specifications

Current Rating : 0.8 Amp  
 Insulator Resistance : 900 Megohms Min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500 V  
 Operating Temperature : -40° C ~ +105°C  
 Soldering Temperature : 260°C for 3~5sec Max.  
 Contact Material : Phosphor Bronze  
 Plating : All Gold or Tin  
 Standard : Gold Flash all over  
 Insulator Material : High Temperature Thermoplastic. UL 94V-0  
 Standard : Nylon-6T (Black)

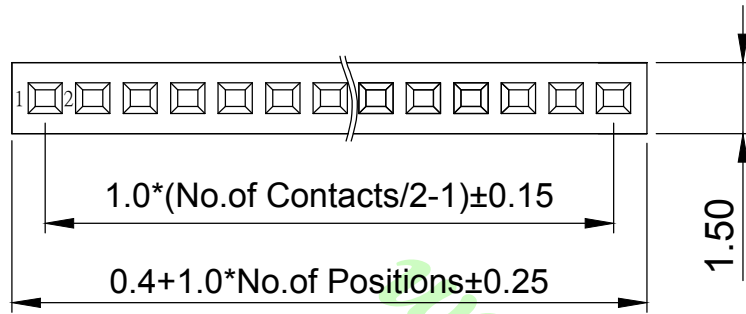


### ORDER INFORMATION

LPCB 100 A S G N 2 - 1xXX

Pitch: 1.0mm  
 Insulation Height: 2.0mm  
 Width: 1.5mm  
 TYPE S: 180°  
 Contactn Plating  
 T : Tin  
 G : Gold Flash  
 D : Gold Flash/Tin

DIP: 2.0mm  
 No. Of Contact  
 Single Row: 1x03~1x20  
 Material  
 N: NYLON 6T  
 C: LCP

### P.C.B Layout

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):	 <b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
		X. ±0.5 X° ±3°		比例/Scale Free	1.00mm Female Header H:2.0 W:1.5 180° Single Row		
		.X ±0.3 .X° ±2°		Size A4	料號/Part No:	圖號/Drawing No:	
		.XX ±0.2 .XX° ±1°			<b>LPCB100ASG N 2-1xXX</b>	MF100CV1XN-1XX-X	
		.XXX ±0.1 .XXX° ±0.5°				核對/APPD. 746 審核/CHKD. Joe 製圖/DR. Mandy 報數/Sheet 1 of 1	
A0	NEW DRAWING	2019.04.01				REV. A0	
REV	概述/REVISION	日期/DATE					