
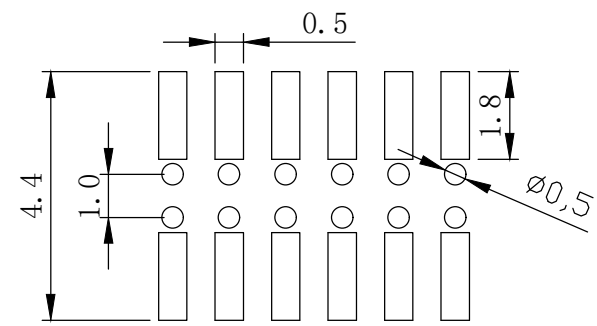

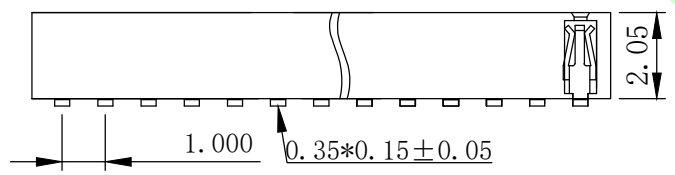


RoHS

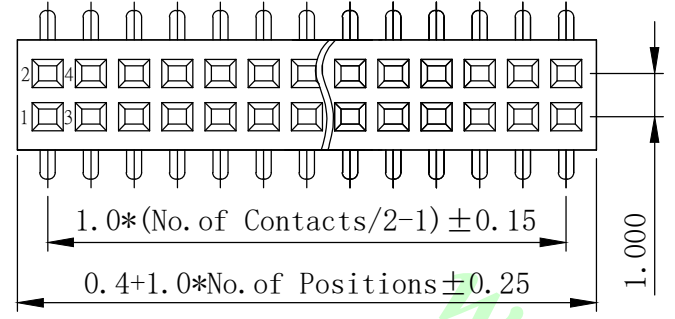

P.C.B SMT Layout

### Specifications

- Current Rating : 0.8 Amp
- Insulator Resistance : 900 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500 V
- Operating Temperature : -40° C ~ +105° C
- Soldering Temperature : 260° C for 3~5sec Max.
- Contact Material : Phosphor Bronze
- Plating : All Gold or Tin
- Standard : Gold Flash all over
- Insulator Material : High Temperature Thermoplastic. UL 94V-0
- Standard : Nylon-6T (Black)

### ORDER INFORMATION

**LPCB 100 A T G N - 3.8 - 2xXX**

- Pitch: 1.0mm
- Insulation Height: 2.05mm
- Width: 2.55mm
- SMT: 3.8mm
- No. Of Contact Dual Row: 2x02~2x40
- Material: N: NYLON 6T, C: LCP
- TYPE T: SMT
- Contact Plating: T: Tin, G: Gold Flash, D: Gold Flash/Tin

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):	<b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
		X. ±0.5 X° ±3°		比例/Scale Free	1.00mm Female Header H:2.05 W:2.55 SMT Dual Row		
A0	NEW DRAWING	2019.04.01	.X ±0.3 .X° ±2°	Size A4	料號/Part No:	圖號/Drawing No:	核對/APPD. Joe
REV	概述/REVISION	日期/DATE	.XX ±0.2 .XX° ±1°		<b>LPCB100ATX X-3.8-2xXX</b>	MF100CS1XN-2XX-X	製圖/DR. Mandy
			.XXX ±0.1 .XXX ±0.5°				報數/Sheet 1 of 1