
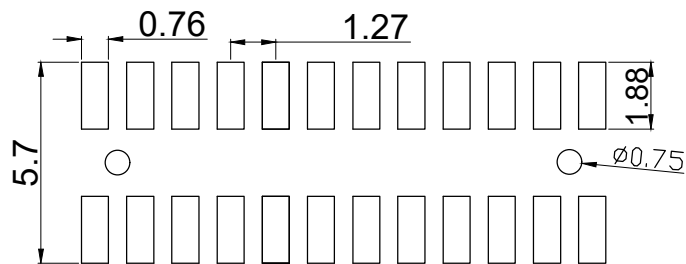

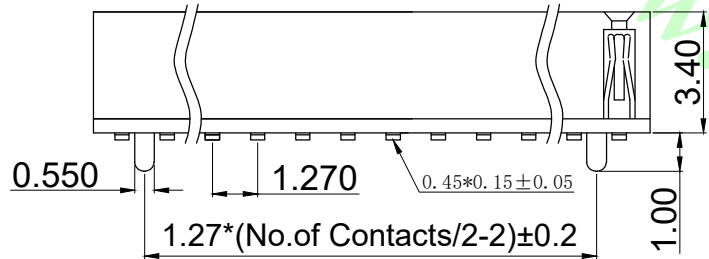


RoHS

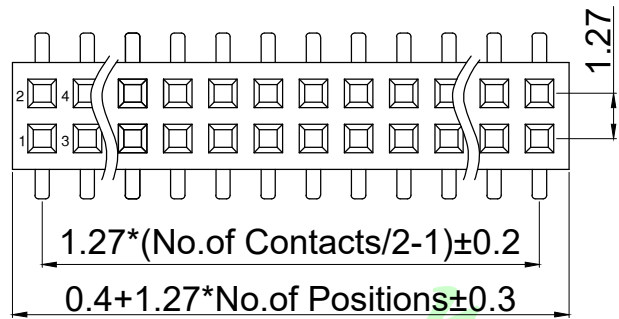


P. C. B Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Standard	: Gold Flash all over
Insulator Material	: Polyester, UL 94V-0
Standard	: NYLON 6T/LCP (BLACK)

ORDER INFORMATION

LPCB	127	A	T	G	X	- 4.7 -	2xXX	- P
								P: Pegs
	Pitch: 1.27mm					SMT: 4.7mm	No. Of Contact	
	Insulation						Dual Row: 2x02~2x40	
	Height: 3.4mm					Material		
	Width: 3.0mm					N: NYLON 6T		
	TYPE T: SMT					C: LCP		
	Contact Plating							
	T : Tin							
	G : Gold Flash							
	G2 : Gold 2u"							

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
		SPECIFIED TOLERANCES ARE		比例/Scale Free	1.27*1.27mm Female Header H:3.4 W:3.0 SMT Type Dual Row ,With Pegs		
A0	NEW DRAWING	2019.09.02	X. ±0.5 .X ±0.3 .XX ±0.2 .XXX ±0.1	X° ±3° .X° ±2° .XX° ±1° .XXX° ±0.5°	料號/Part No:	圖號/Drawing No:	核對/APPD. Joe
REV	概述/REVISION	日期/DATE		Size A4	LPCB127ATG X-4.7-2*XX-P	MF127GS1GX-2XX-PT	製圖/DR. Mandy
							報數/Sheet 1 of 1
							REV. A0