
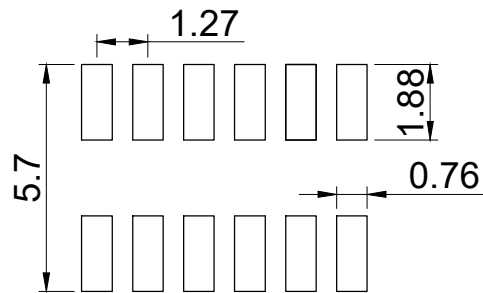


RoHS

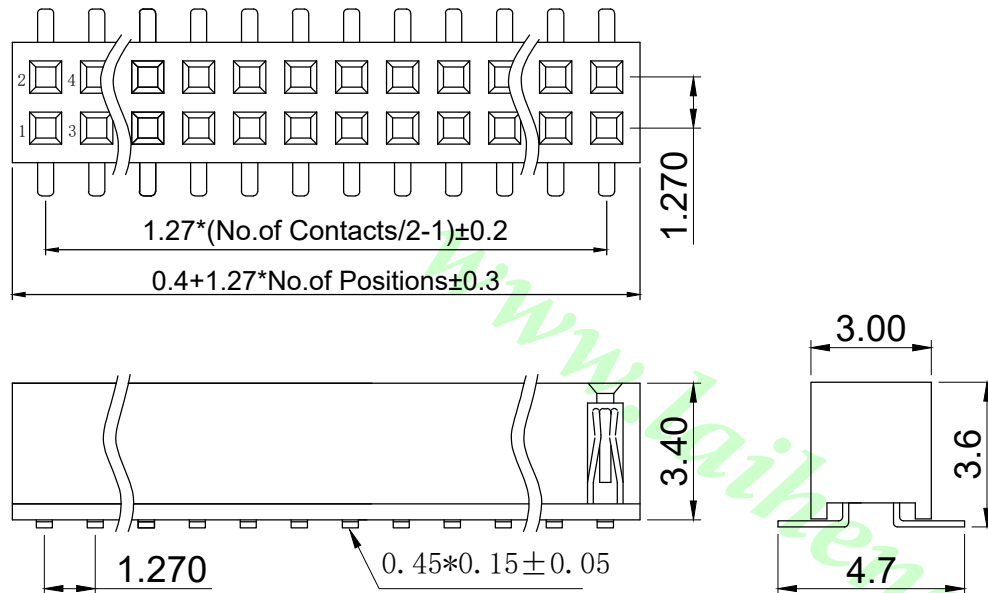

P. C. B Layout

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Phosphor Bronze.
 Standard : Gold Flash all over
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon 6T/LCP (BLACK)

ORDER INFORMATION





LPCB 127 A T G X - 4.7 - 2xXX

Pitch: 1.27mm
 Insulation
 Height: 3.4mm
 Width: 3.0mm
 TYPE T: SMT
 Contact Plating
 T : Tin
 G : Gold Flash
 G2 : Gold 2u"

SMT: 4.7mm
 No. Of Contact
 Dual Row: 2x02~2x40
 Material
 N: NYLON 6T
 C: LCP

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title): 1.27*1.27mm Female Header H:3.4 W:3.0 SMT Type Dual Row	 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
		X. ±0.5 X° ±3° .X ±0.3 .X° ±2° .XX ±0.2 .XX° ±1° .XXX ±0.1 .XXX° ±0.5°		比例/Scale Free	料號/Part No : LPCB127ATGX-4.7-2×XX	
A0	NEW DRAWING	2019.09.02		Size A4		核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy
REV	概述/REVISION	日期/DATE				報數/Sheet 1 of 1

RoHS

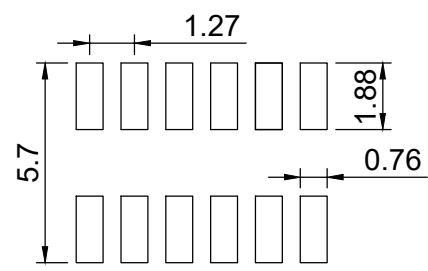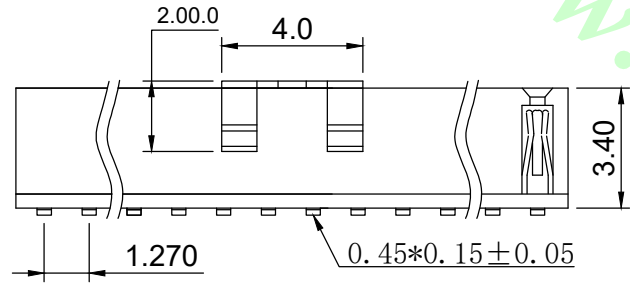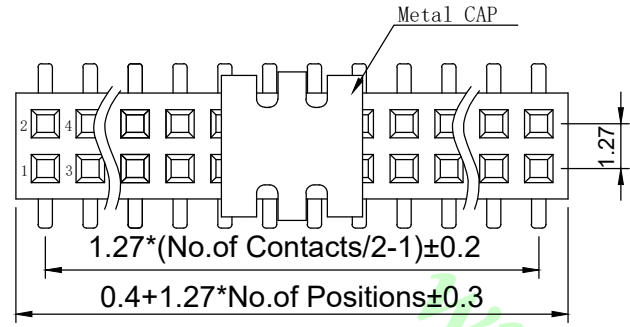

P. C. B Layout

Specifications

- Current Rating : 1 Amp
- Insulator Resistance : 1000 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500 V
- Operating Temperature : -40°C ~ +105°C
- Soldering Temperature : 260°C for 3~5sec Max.
- Contact Material : Phosphor Bronze.
- Standard : Gold Flash all over
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon 6T/LCP (BLACK)

ORDER INFORMATION

LPCB 127 A T G X - 4.7 - 2xXX - R I

Pitch: 1.27mm
 Insulation Height: 3.4mm
 Width: 3.0mm
 T: SMT
 Contactn Plating
 T : Tin
 G : Gold Flash
 G2 : All Gold 2u"
 G3 : All Gold 3u"

Material
 N: NYLON 6T
 C: LCP

Other
 R: Reel Packing
 I: Metal Cap

No.Of Contact
 Dual Row: 2x02~2x40

SMT Expand Size: 4.7mm

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):
X. ±0.5	X° ±3°	比例/Scale	1.27*1.27mm Female Header H:3.4 W:3.0 SMT Type Dual Row ,Reel+Metal CAP
.X ±0.3	.X° ±2°	Free	
.XX ±0.2	.XX° ±1°	Size	料號/Part No :
.XXX±0.1	.XXX±0.5°	A4	LPCB127ATGX-4.7-2×XX-RI

圖號/Drawing No :	製圖/DR:	核對/APPD.	審核/CHKD.	製圖/DR.	報數/Sheet	REV.
MF127GS1GX-2XX-IR	Mandy	Joe	Joe	Mandy	1 of 1	A0

鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486