
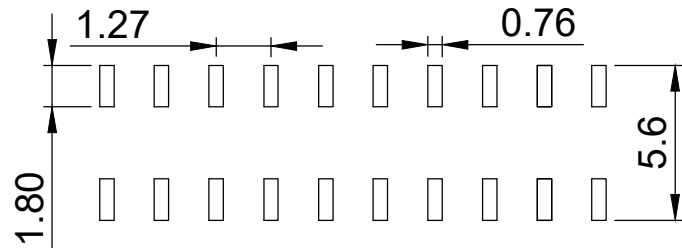
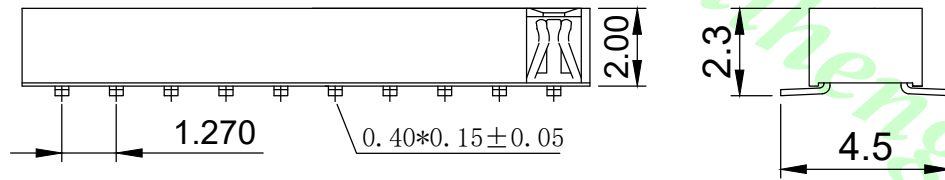


RoHS

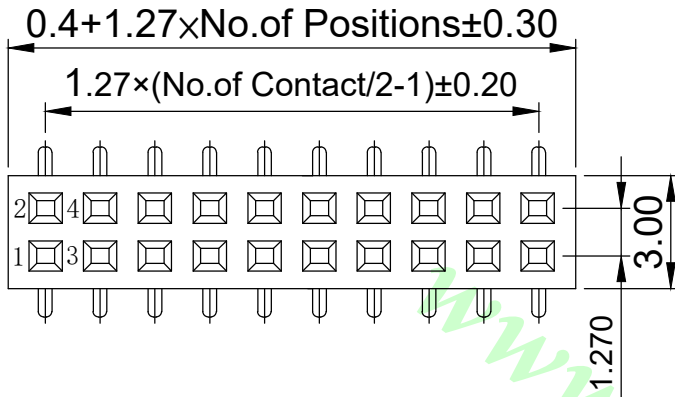

P. C. B Layout

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Phosphor Bronze.
 Standard : Gold Flash all over
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon 6T (BLACK)

ORDER INFORMATION

LPCB 127 D T G N - 4.5 - 2xXX

Pitch: 1.27mm

SMT: 4.5mm


Insulation
 Height: 2.0mm
 Width: 3.0mm

Material
 N: NYLON 6T
 C: LCP

No. Of Contact
 Dual Row: 2x02~2x40

TYPE T: SMT

Contactn Plating
 T : Tin
 G : Gold Flash
 G2 : Gold 2u"

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
		X. ±0.5 X° ±3°		比例/Scale Free	1.27*1.27mm Female Header H:2.0 W:3.0 SMT Dual Row		
A0	NEW DRAWING	2019.09.02	.X ±0.3 .X° ±2°	Size A4	料號/Part No:	圖號/Drawing No:	
REV	概述/REVISION	日期/DATE	.XX ±0.2 .XX° ±1°		LPCB127DTG N-4.5-2×XX	MF127HSIGN-2XX-1	
			.XXX ±0.1 .XXX° ±0.5°			核對/APPD. Ho	審核/CHKD. Joe
						製圖/DR. Mandy	報數/Sheet 1 of 1
						REV. A0	