
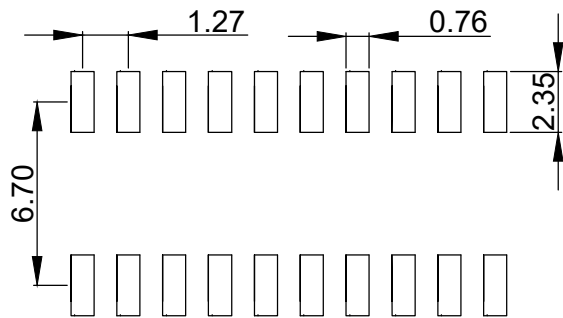
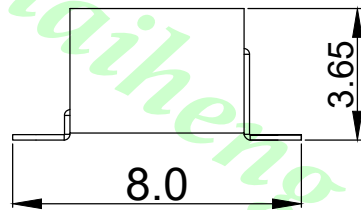
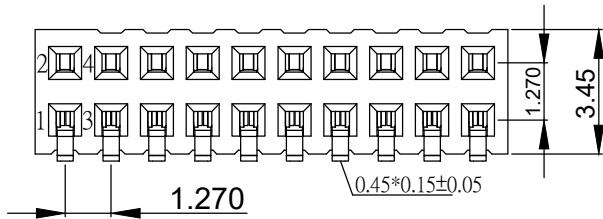


RoHS

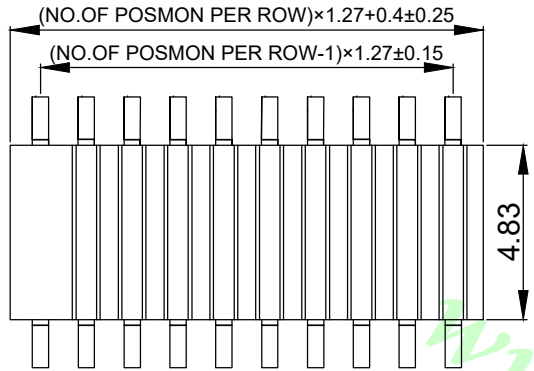

P. C. B Layout

### Specifications

Current Rating : 1 Amp  
 Insulator Resistance : 1000 Megohms Min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500 V  
 Operating Temperature : -40°C ~ +105°C  
 Soldering Temperature : 260°C for 3~5sec Max.  
 Contact Material : Phosphor Bronze.  
 Standard : Gold Flash all over  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon 6T (BLACK)

### ORDER INFORMATION

LPCB 127 E TEG N - 8 - 2xXX

Pitch: 1.27mm

Insulation  
 Height: 3.45mm  
 Width: 4.83mm

SMT Side Enter  
 (SMT 側插)

Contactn Plating  
 T : Tin  
 G : Gold Flash  
 G2 : Gold 2u"

SMT: 8.0mm

No.Of Contact  
 Dual Row: 2x02~2x40  
 Material  
 N: NYLON 6T  
 C: LCP

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title): 1.27*1.27mm Female Header H:3.45 W:4.83
X. ±0.5	X° ±3°	比例/Scale Free	料號/Part No : <b>LPCB127ETEG N- 8 -2xXX</b>
.X ±0.3	.X° ±2°	Size A4	
.XX ±0.2	.XX° ±1°		
.XXX ±0.1	.XXX° ±0.5°		圖號/Drawing No : <b>MF127JS1XX-2XX-T</b>

A0	NEW DRAWING	2019.09.02
REV	概述/REVISION	日期/DATE



**鍊亨電子有限公司**  
 LAI HENG TECHNOLOGY LTD.  
 TEL: (02) 8228-6487 FAX: (02) 8228-6486

核對/APPD. 7/0	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
-----------------	-----------------	-----------------	--------------------	------------