
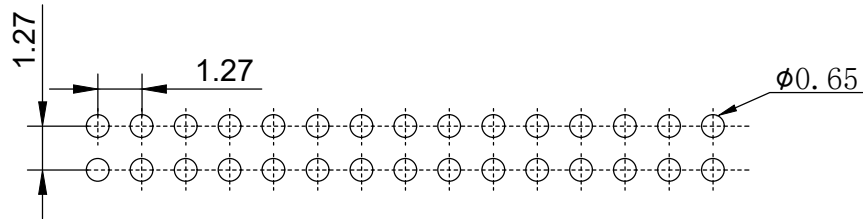
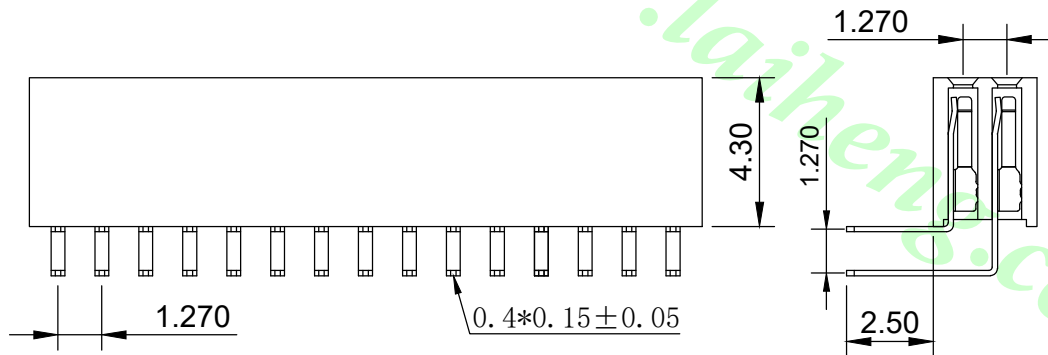


RoHS

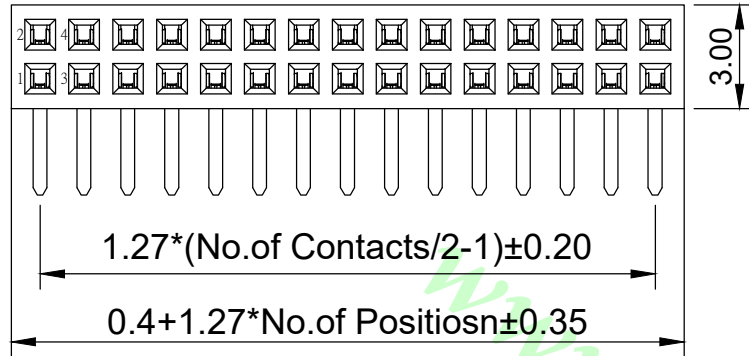

P. C. B Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Standard	:Gold Flash all over
Insulator Material	:Polyester, UL 94V-0
Standard	:NYLON 6T (BLACK)

ORDER INFORMATION

LPCB 127 B R G N 0 / 2.5 - 2xXX

Pitch:1.27mm

Insulation
Height: 4.3mm
Width: 3.0mm


TYPE R:90°

Contactn Plating
T : Tin
G : Gold Flash

DIP:2.5mm

Material
N: NYLON 6T
C: LCP

No.Of Contact
Dual Row: 2x02~2x40

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):		 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486	
			X. ±0.5 X.° ±3°		比例/Scale Free	1.27*1.27mm Female Header H:4.3 W:3.0 90° Dual Row			
A0	NEW DRAWING	2019.09.02	.X ±0.3 .X° ±2°	.XX ±0.2 .XX° ±1°	Size A4	料號/Part No:		圖號/Drawing No:	
REV	概述/REVISION	日期/DATE	.XXX±0.1 .XXX±0.5°			LPCB127BRG N 0 / 2.5-2xXX		MF127FR1XX-2XX-X	
			核對/APPD. Joe	審核/CHKD. Joe	製圖/DR. Mandy	報數/Sheet 1 of 1			REV. A0