



SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

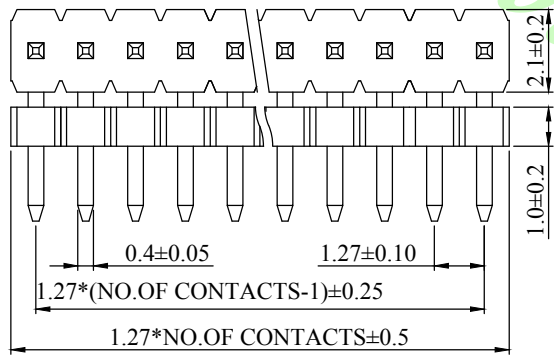

ORDER INFORMATION


LP/H 127 U X N a A d / c A b - 1xXX

Pitch: 1.27mm Type U: 90° Up Angle
 Material N: NYLON 6T
 No. Of Contact Single Row: 1x02~1x50

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 1.0mm, Width: 2.1mm
 d: Pin Chart Dimension See Pin Chart
 c: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 1.0mm, Width: 2.1mm
 b: Pin Chart Dimension See Pin Chart



Pin Chart:

- a : _____ mm
- b : _____ mm
- c : _____ mm
- d : _____ mm

Recommended P.C.Board
 Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 1.27mm Pin Header H:1.0 W:2.1 Single Row Dual Base Up Angle Dip Type				
比例/Scale Free			料號/Part No : LP/H127UXNaAd/cAb-1×XX	圖號/Drawing No : 127-GR2D-1×XX-ABCD-0-0				
A0	NEW DRAWING	2018.08.16	Size A4	核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
REV	概述/REVISION	日期/DATE						