
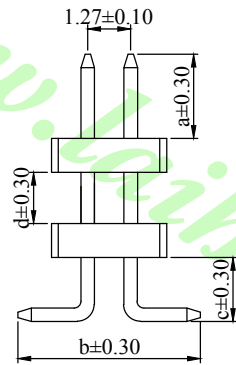


SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

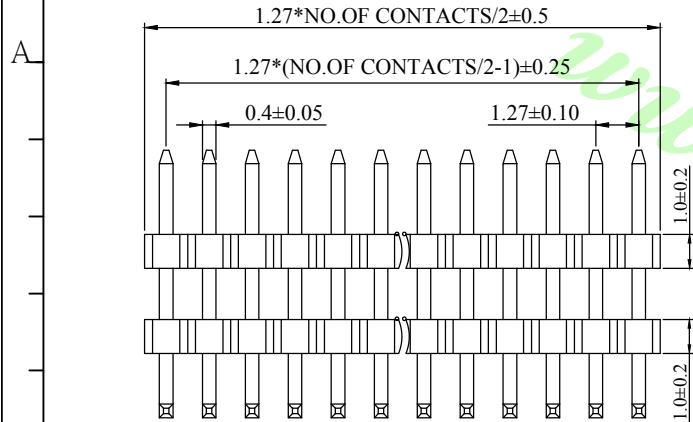

ORDER INFORMATION

LP/H 127 T X N a A d A c - b - 2xXX

Pitch: 1.27mm Type T:SMT
 Material N: NYLON 6T

No.Of Contact
 Dual Row: 2x02~2x50

Contact Plating
 T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10 : All Gold 10u"
 G15 : All Gold 15u"
 G20 : All Gold 20u"
 G30 : All Gold 30u"


SMT Expand Size: 5.0~5.5mm
 b: Pin Chart Dimension See Pin Chart
 Standard: 5.5

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 1.0mm, Width: 3.4mm
 d: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 1.0mm, Width: 3.4mm
 c: Pin Chart Dimension See Pin Chart


Standard: 3A0A1.2

Pin Chart:

- a : _____ mm
Standard: 3.0mm
- b : _____ mm
Standard: 5.5mm
- c : _____ mm
Standard: 1.2mm
- d : _____ mm
Standard: 0.0mm



Recommended P.C.Board
 Hold Layout

		公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486	
				比例/Scale Free	料號/Part No :		
A0	NEW DRAWING	2018.08.16		Size A4	1.27mm Pin Header H:1.0 W:3.4 Dual Row Dual Base SMT Type	圖號/Drawing No :	核加/APPD. Joe
REV	概述/REVISION	日期/DATE			LP/H127TXNaAdAc-b-2×XX	127-GMD-2×XX-ABCD-1	審核/CHKD. Joe
							製圖/DR. Mandy
							張數/Sheet 1 of 1
							REV. A0