
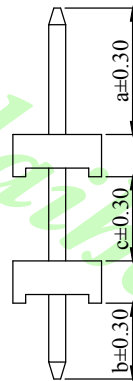


**SPECIFICATION**

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -55°C to +105°C

**MATERIAL**

Contact: Coppery Alloy  
 Insulator: NYLON 6T, UL94V-0  
 Plating: All Gold or Tin

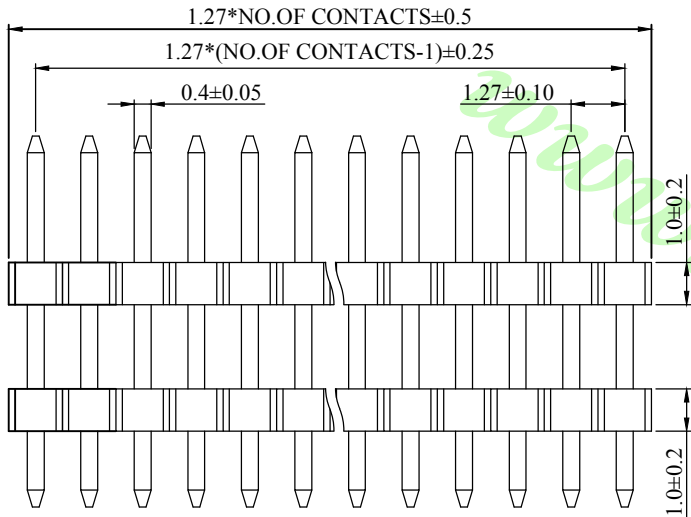

**ORDER INFORMATION**

LP/H 127 S X N a A c A b - 1xXX

Pitch:1.27mm Type S:180°

Material N: NYLON 6T

No.Of Contact Single Row: 1x02~1x50

**Contact Plating**

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

a: Pin Chart Dimension See Pin Chart  
 A: Insulation Height:1.0mm, Width:2.1mm  
 c: Pin Chart Dimension See Pin Chart  
 A: Insulation Height:1.0mm, Width:2.1mm  
 b: Pin Chart Dimension See Pin Chart

Standard: 3A0A2.3

Pin Chart:

a : \_\_\_\_\_ mm


Standard:3.0mm

b : \_\_\_\_\_ mm

Standard:2.3mm

c : \_\_\_\_\_ mm

Standard:0.0mm



Recommended P.C.Board Hold Layout

|     |             |            |  |
|-----|-------------|------------|--|
|     |             |            | 公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |
| A0  | NEW DRAWING | 2018.08.16 |  |
| REV | 概述/REVISION | 日期/DATE    |  |

單位/Unit mm

比例/Scale

Free

Size A4

品名/Title :

1.27mm Pin Header H:1.0 W:2.1  
 Single Row Dual Base Straight Dip Type

料號/Part No :

LP/H127SXNaAcAb-1×XX

圖號/Drawing No :

127-GSD-1×XX-ABC-0-0



**鍊亨電子有限公司**  
 LAI HENG TECHNOLOGY LTD.

TEL:(02) 8228-6487 FAX:(02) 8228-6486

|          |          |        |          |      |
|----------|----------|--------|----------|------|
| 核加/APPD. | 審核/CHKD. | 製圖/DR. | 張數/Sheet | REV. |
| 740      | Joe      | Mandy  | 1 of 1   | A0   |