


SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

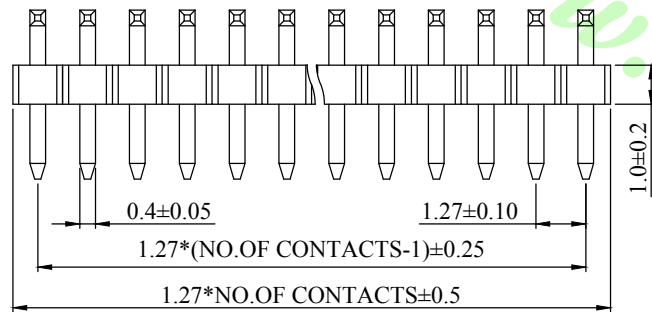

ORDER INFORMATION

LP/H 127 U X N a / c A b - 1xXX

Pitch: 1.27mm

Type: U: 90°
 Up Angle

Material: N: NYLON 6T

No. Of Contact: 1xXX
 Single Row: 1x02~1x50

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 1.0mm, Width: 2.1mm
 c: Pin Chart Dimension See Pin Chart
 b: Pin Chart Dimension See Pin Chart

Standard: 3/1A2.3

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

Pin Chart:

a : _____ mm


Standard: 3.0mm

b : _____ mm

Standard: 2.3mm

c : _____ mm

Standard: 1.0mm

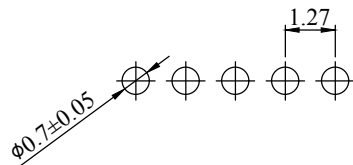

Recommended P.C.Board
 Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	1.27mm Pin Header H:1.0 W:2.1 Single Row Up Angle Dip Type	
REV	概述/REVISION	日期/DATE	Size A4	料號/Part No : LP/H127UXNa/cAb-1×XX	圖號/Drawing No : 127-GR2-1×XX-ABC-0-0
			核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy
			張數/Sheet 1 of 1	REV. A0	