


**SPECIFICATION**

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -55°C to +105°C (NYLON 6T)

**MATERIAL**

Contact: Copper Alloy  
 Insulator: Polyester, UL94V-0  
 NYLON 6T  
 Plating: All Gold or Tin

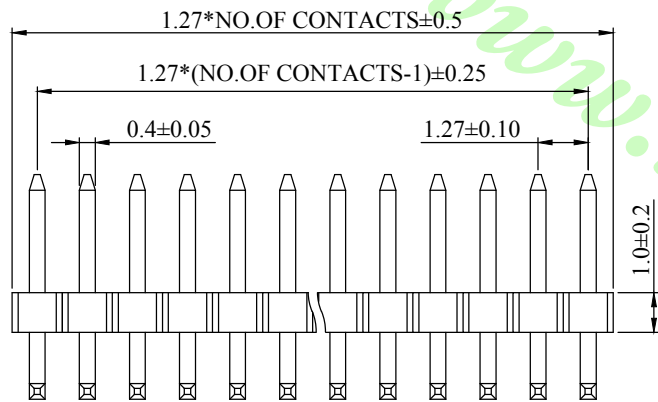

**ORDER INFORMATION**

LP/H 127 R X N a A c / b - 1xXX

Pitch: 1.27mm Type R: 90°

Material N: NYLON 6T


No. Of Contact Single Row: 1x02~1x50

a: Pin Chart Dimension See Pin Chart  
 A: Insulation Height: 1.0mm, Width: 2.1mm  
 c: Pin Chart Dimension See Pin Chart  
 b: Pin Chart Dimension See Pin Chart

Standard: 3A1/2.3

**Contact Plating**

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"



**Pin Chart:**

a : \_\_\_\_\_ mm


Standard: 3.0mm

b : \_\_\_\_\_ mm

Standard: 2.3mm

c : \_\_\_\_\_ mm

Standard: 1.0mm

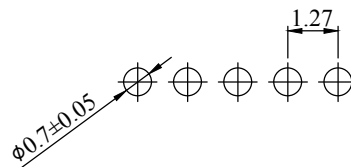

Recommended P.C.Board Hold Layout

A0	NEW DRAWING	2018.08.16
REV	概述/REVISION	日期/DATE

公悉/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

單位/Unit mm  
 比例/Scale Free  
 Size A4

品名/Title :

1.27mm Pin Header H:1.0 W:2.1  
 Single Row Down Angle Dip Type

料號/Part No :

LP/H127RXNaAc/b-1×XX

圖號/Drawing No :

127-GR1-1×XX-ABC-0-0



鍊亨電子有限公司  
 LAI HENG TECHNOLOGY LTD.

TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
--------------	--------------	--------------	-----------------	---------