

Pin Chart:


a : \_\_\_\_\_ mm

Standard:4.0mm

b : \_\_\_\_\_ mm

Standard:2.8mm

Recommended P.C.Board  
Hold Layout

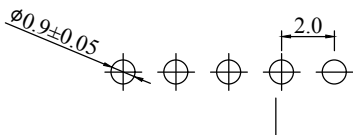

SPECIFICATION

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -40°C to +85°C (PBT)  
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy  
 Insulator: Polyester,UL94V-0  
 NYLON 6T or PBT  
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 200 S X X a A b - 1xXX

Pitch:2.0mm Type S:180°

Material P: PBT N: NYLON 6T

No.Of Contact Single Row: 1x01~1x40

a: Pin Chart Dimension See Pin Chart  
 A: Insulation Height:2.0mm, Width:2.0mm  
 b: Pin Chart Dimension See Pin Chart

Standard: 4A2.8

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

單位/Unit mm

比例/Scale

Free Size A4

品名/Title : 2.0mm Pin Header H:2.0 W:2.0 Single Row Straight Dip Type

料號/Part No : LP/H200SXXaAb-1×XX

圖號/Drawing No : 200-GS-1×XX-AB-X

<b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486				
核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0