



**SPECIFICATION**

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -40°C to +85°C (PBT)  
 -55°C to +105°C (NYLON 6T)

**MATERIAL**

Contact: Copper Alloy  
 Insulator: Polyester, UL94V-0  
 NYLON 6T or PBT  
 Plating: All Gold or Tin

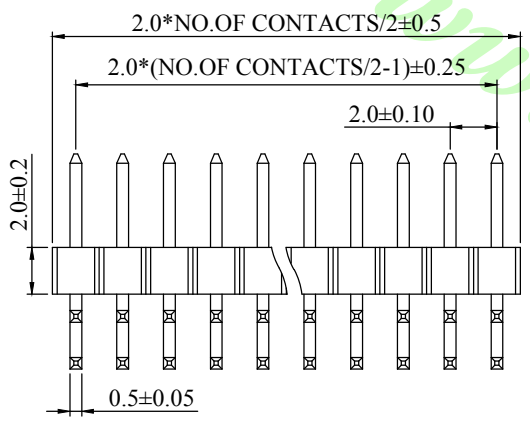


**ORDER INFORMATION**

LP/H 200 R X X a A c / b - 2xXX  
 Pitch Type Material  
 R:90° P: PBT  
 N: NYLON 6T

No.Of Contact  
 Dual Row: 2x02~2x40  
 a: Pin Chart Dimension See Pin Chart  
 A: Insulation Height:2.0mm, Width:4.0mm  
 c: Pin Chart Dimension See Pin Chart  
 b: Pin Chart Dimension See Pin Chart


Contactn Plating  
 T : Tin  
 G : Gold Flash  
 G3 : All Gold 3u"  
 G5 : All Gold 5u"  
 G10: All Gold 10u"  
 G15: All Gold 15u"  
 G20: All Gold 20u"  
 G30: All Gold 30u"

Standard: 4A1/2.8



Recommended P.C.Board  
 Hold Layout

Pin Chart:  
 a : \_\_\_\_\_ mm  
 Standard:4.0mm  
 b : \_\_\_\_\_ mm  
 Standard:2.8mm  
 c : \_\_\_\_\_ mm  
 Standard:1.0mm

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	 <b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	2.0mm Pin Header H:2.0 W:4.0 Dual Row Down Angle Dip Type	
REV	概述/REVISION	日期/DATE	Size A4	料號/Part No : LP/H200RX X aAc/b-2×XX	圖號/Drawing No : 200-GR1-2×XX-ABC-X
			核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy
			張數/Sheet 1 of 1		REV. A0