
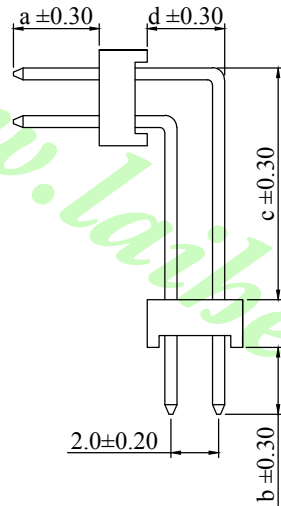


SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Coppery Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

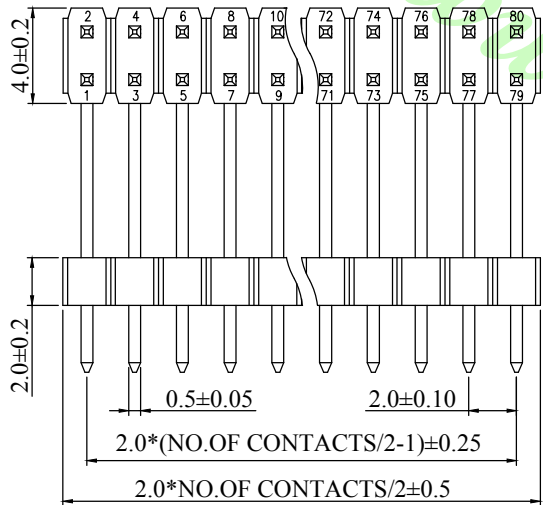


ORDER INFORMATION

LP/H 200 U X X a A d / c A b - 2xXX
 Pitch: 2.0mm Type U: 90° Up Angle Material P: PBT N: NYLON 6T
 No. Of Contact Dual Row: 2x02~2x40

Contact Plating

T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10 : All Gold 10u"
 G15 : All Gold 15u"
 G20 : All Gold 20u"
 G30 : All Gold 30u"

a : Pin Chart Dimension See Pin Chart
 A : Insulation Height: 2.0mm, Width: 4.0mm
 d : Pin Chart Dimension See Pin Chart
 c : Pin Chart Dimension See Pin Chart
 A : Insulation Height: 2.0mm, Width: 4.0mm
 b : Pin Chart Dimension See Pin Chart

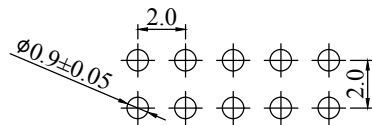

Recommended P.C.Board
 Hold Layout

Pin Chart:

a : _____ mm
 b : _____ mm
 c : _____ mm
 d : _____ mm

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.0mm Pin Header H:2.0 W:4.0 Dual Row Dual Base Up Angle Dip Type	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H200UX X aAd/cAb-2×XX	
REV	概述/REVISION	日期/DATE	Size A4	圖號/Drawing No : 200-GR2D-2×XX-ABCD-X	核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0