

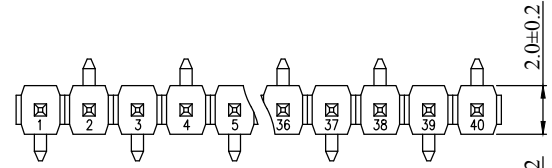
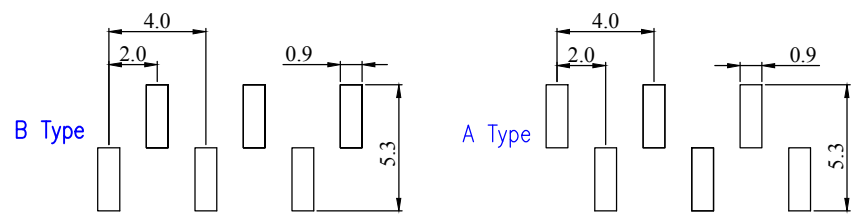


* B Type

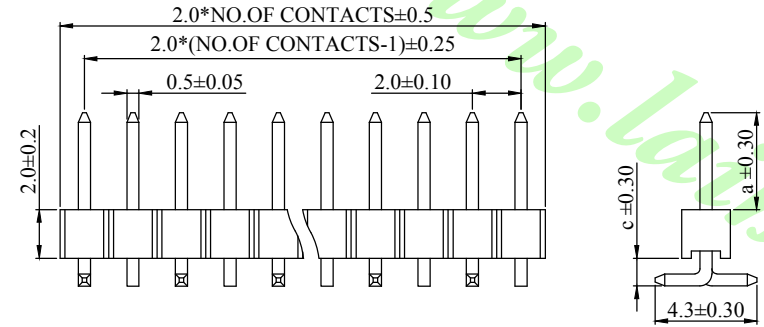

* A Type

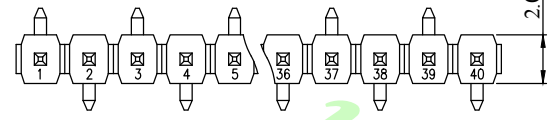

Recommended P.C.Board Hold Layout

SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 200 T X N a A c - 4.3 - 1xXX XT

Pitch: 2.0mm Type T: SMT Material N: NYLON 6T other AT: A Type BT: B Type

Contact Plating T: Tin G: Gold Flash G3: All Gold 3u" G5: All Gold 5u" G10: All Gold 10u" G15: All Gold 15u" G20: All Gold 20u" G30: All Gold 30u"

No. Of Contact Single Row: 1x01~1x40

SMT Expand Size Standard: 4.3

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.0mm, Width: 2.0mm
 c: Pin Chart Dimension See Pin Chart
 Standard: 4A1.2

Pin Chart:

a : _____ mm
 Standard: 4.0mm
 c : _____ mm
 Standard: 1.2mm

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.0mm Pin Header H:2.0 W:2.0 Single Row SMT Type		錄亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H200TXNaAc-4.3-1×XXXT		
REV	概述/REVISION	日期/DATE	Size A4			核加/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0