

SPECIFICATION



Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

A

A

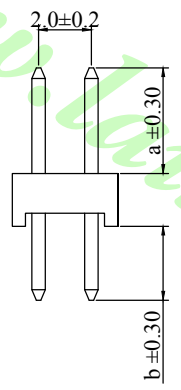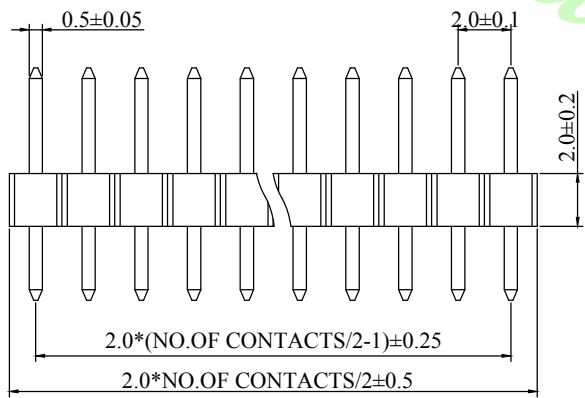

ORDER INFORMATION

LP/H 200 S X X a A b - 2xXX
 Pitch: 2.0mm Type S: 180° Material P: PBT N: NYLON 6T
 No. Of Contact Dual Row: 2x02~2x40

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.0mm, Width: 4.0mm
 b: Pin Chart Dimension See Pin Chart


Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10 : All Gold 10u"
- G15 : All Gold 15u"
- G20 : All Gold 20u"
- G30 : All Gold 30u"

Standard: 4A2.8

Pin Chart:

a : _____ mm
 Standard: 4.0mm
 b : _____ mm
 Standard: 2.8mm

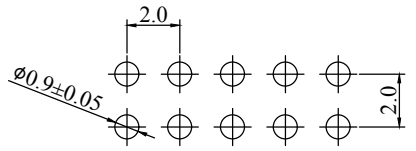

Recommended P.C.Board Hold Layout

C

C

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.0mm Pin Header H:2.0 W:4.0 Dual Row Straight Dip Type				
比例/Scale Free			料號/Part No : LP/H200SXaAb-2×XX	圖號/Drawing No : 200-GS-2×XX-AB-X				
A0	NEW DRAWING	2018.08.16	Free Size A4	核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
REV	概述/REVISION	日期/DATE						