



SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

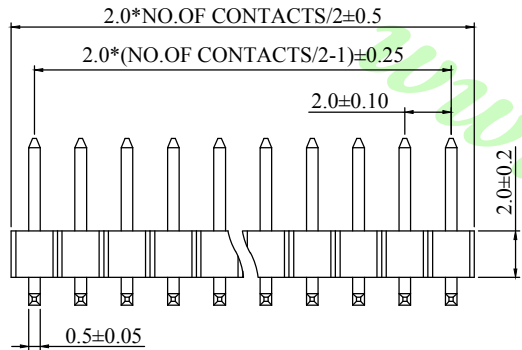

ORDER INFORMATION

LP/H 200 T X N a A c - 6.3 - 2xXX

Pitch: 2.0mm Type T: SMT

Material N: NYLON 6T

No. Of Contact Dual Row: 2x01~2x40

Contact Plating

T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10 : All Gold 10u"
 G15 : All Gold 15u"
 G20 : All Gold 20u"
 G30 : All Gold 30u"

SMT Expand Size Standard: 6.3

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.0mm, Width: 4.0mm
 c: Pin Chart Dimension See Pin Chart
 Standard: 4A1.2


Pin Chart:

a : _____ mm

Standard: 4.0mm

c : _____ mm

Standard: 1.2mm

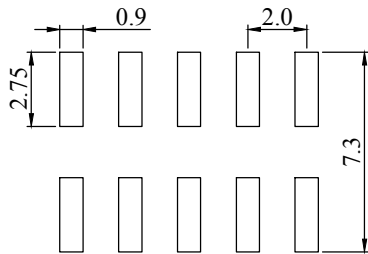

Recommended P.C.Board Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.0mm Pin Header H:2.0 W:4.0 Dual Row SMT Type	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H200TXNaAc-6.3-2×XX	
REV	概述/REVISION	日期/DATE	Size A4	圖號/Drawing No : 200-GM-2×XX-ABC-N	核加/APPD. 740 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0