

SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 200 S X N a B b - 2xXX

Pitch: 2.0mm Type S: 180°

Material N: NYLON 6T



No. Of Contact
 Dual Row: 2x02~2x40

a: Pin Chart Dimension See Pin Chart
 B: Insulation Height: 1.5mm, Width: 4.0mm
 b: Pin Chart Dimension See Pin Chart

Standard: 4B2.8

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10 : All Gold 10u"
- G15 : All Gold 15u"
- G20 : All Gold 20u"
- G30 : All Gold 30u"

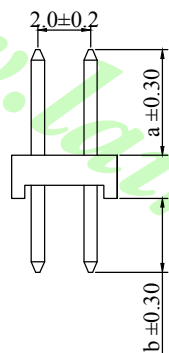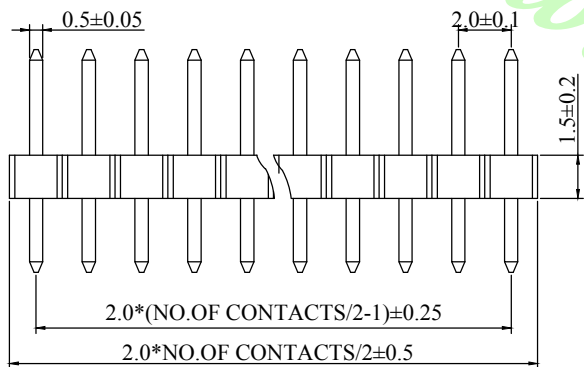


Pin Chart:

a : _____ mm


Standard: 4.0mm

b : _____ mm

Standard: 2.8mm

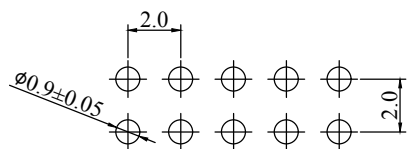

Recommended P.C.Board
 Hold Layout

		公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title :	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16		比例/Scale Free	2.0mm Pin Header H:1.5 W:4.0 Dual Row Straight Dip Type	
REV	概述/REVISION	日期/DATE		Size A4	料號/Part No : LP/H200SX_NaBb-2×XX	圖號/Drawing No : 200-GS-2×XX-AB-N(H1.5)
					核加/APPD. 740	審核/CHKD. Joe
					製圖/DR. Mandy	張數/Sheet 1 of 1
					REV. A0	