
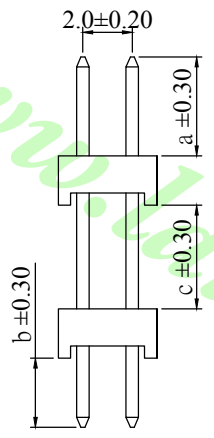


SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

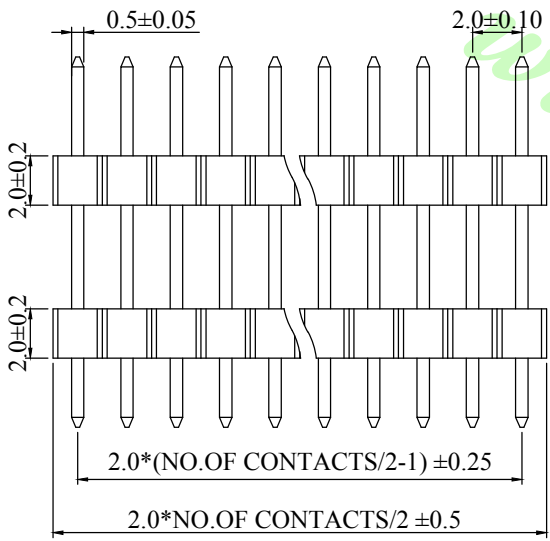

ORDER INFORMATION

LP/H 200 S X X a A c A b - 2xXX

Pitch: 2.0mm Type S: 180°
 Material P: PBT N: NYLON 6T
 No. Of Contact Dual Row: 2x02~2x40

Contact Plating


- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.0mm, Width: 4.0mm
 c: Pin Chart Dimension See Pin Chart
 b: Pin Chart Dimension See Pin Chart

Standard: 4A0A2.8

Pin Chart:

- a : _____ mm
Standard: 4.0mm
- b : _____ mm
Standard: 2.8mm
- c : _____ mm
Standard: 0.0mm

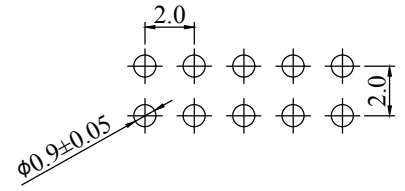

Recommended P.C.Board Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.0mm Pin Header H:2.0 W:4.0 Dual Row Dual Base Straight Dip Type	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H200SXaAcAb-2×XX	
REV	概述/REVISION	日期/DATE	Size A4	圖號/Drawing No : 200-XSD-2×XX-A/B/C-X	核加/APPD. 740 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0