



**SPECIFICATION**

Current Rating: 1 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -40°C to +85°C (PBT)  
 -55°C to +105°C (NYLON 6T)

**MATERIAL**

Contact: Coppery Alloy  
 Insulator: Polyester, UL94V-0  
 NYLON 6T or PBT  
 Plating: All Gold or Tin

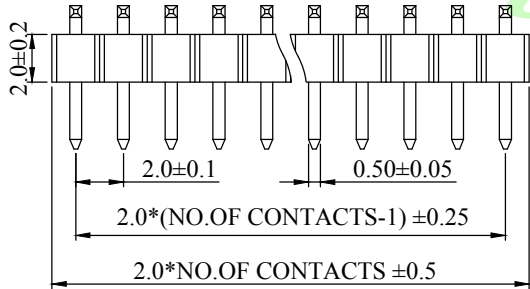


**ORDER INFORMATION**

LP/H 200 U X X a / c A b - 1xXX

Pitch: 2.0mm Type U: 90° Up Angle  
 Material P: PBT N: NYLON 6T  
 No. Of Contact Single Row: 1x01~1x40

a: Pin Chart Dimension See Pin Chart  
 c: Pin Chart Dimension See Pin Chart  
 A: Insulation Height: 2.0mm, Width: 2.0mm  
 b: Pin Chart Dimension See Pin Chart

Standard: 4/1A2.8

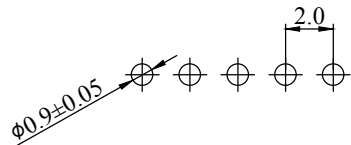

Recommended P.C.Board Hold Layout

Pin Chart:

a : \_\_\_\_\_ mm

Standard: 4.0mm

b : \_\_\_\_\_ mm

Standard: 2.8mm

c : \_\_\_\_\_ mm

Standard: 1.0mm

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	<b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
			比例/Scale	2.0mm Pin Header H:2.0 W:2.0 Single Row Up Angle Dip Type	
A0	NEW DRAWING	2018.08.16	Free Size A4	料號/Part No : <b>LP/H200UXXa/cAb-1×XX</b>	
REV	概述/REVISION	日期/DATE		圖號/Drawing No : <b>200-GR2-1×XX-ABC-X</b>	
				核加/APPD. 740	審核/CHKD. Joe
				製圖/DR. Mandy	張數/Sheet 1 of 1
				REV. A0	