

SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 254 U X X a / c A b - 1xXX

Pitch: 2.54mm

Type
 U: 90°
 Up Angle

Material
 P: PBT
 N: NYLON 6T

No. Of Contact
 Single Row: 1x02~1x40

a: Pin Chart Dimension See Pin Chart
 c: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 2.54mm
 b: Pin Chart Dimension See Pin Chart

Standard: 6/1.5A3

Contact Plating

T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10 : All Gold 10u"
 G15 : All Gold 15u"
 G20 : All Gold 20u"
 G30 : All Gold 30u"

Pin Chart:

a : _____ mm


Standard: 6.0mm

b : _____ mm


Standard: 3.0mm

c : _____ mm

Standard: 1.5mm

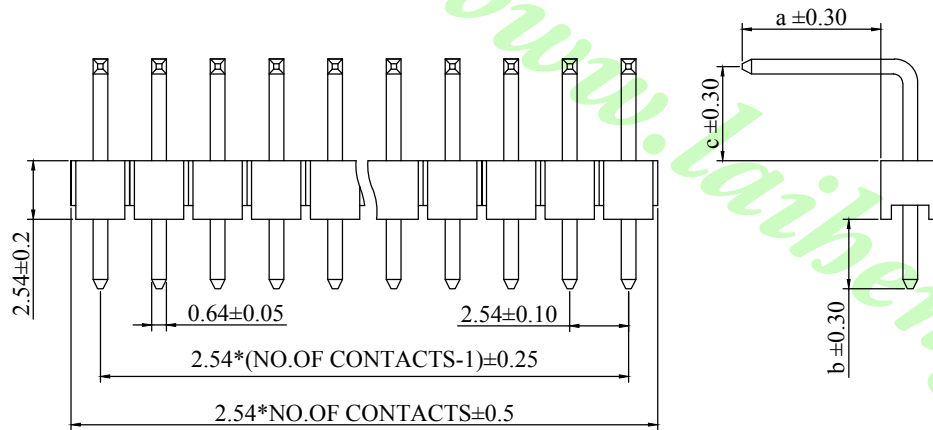

Recommended P.C.Board
 Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :		 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
			比例/Scale Free	2.54mm Pin Header H:2.54 W:2.54 Single Row Up Angle Dip Type		
A0	NEW DRAWING	2018.08.16	Size A4	料號/Part No :		核加/APPD. 7/6
REV	概述/REVISION	日期/DATE		圖號/Drawing No :		審核/CHKD. Joe
				254-GR2-1×XX-ABC-X		製圖/DR. Mandy
				254-GR2-1×XX-ABC-X		張數/Sheet 1 of 1
						REV. A0