



SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

A

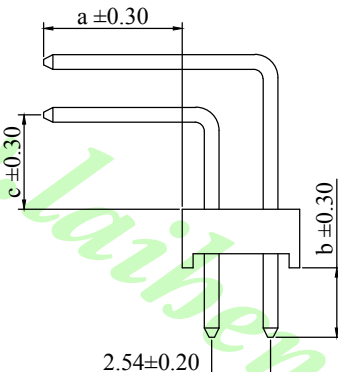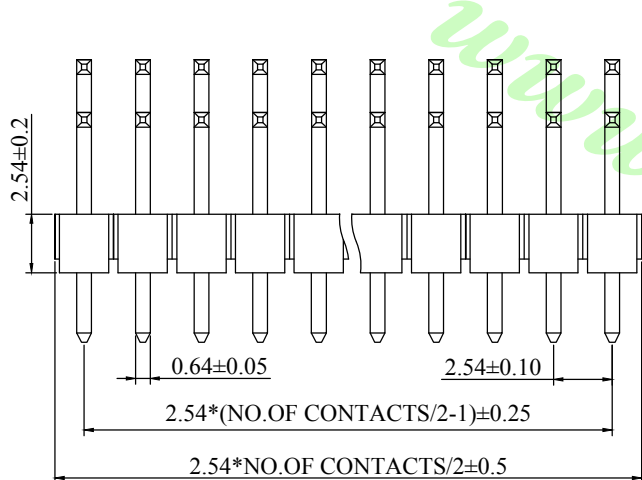

ORDER INFORMATION

LP/H 254 U X X a / c A b - 2xXX
 Pitch: 2.54mm Type U: 90° Up Angle
 Material P: PBT N: NYLON 6T
 No. Of Contact Dual Row: 2x02~2x40

Contact Plating


T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10: All Gold 10u"
 G15: All Gold 15u"
 G20: All Gold 20u"
 G30: All Gold 30u"

a: Pin Chart Dimension See Pin Chart
 c: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 5.08mm
 b: Pin Chart Dimension See Pin Chart

Standard: 6/1.5A3

Pin Chart:

a : _____ mm
 Standard: 6.0mm
 b : _____ mm
 Standard: 3.0mm
 c : _____ mm
 Standard: 1.5mm

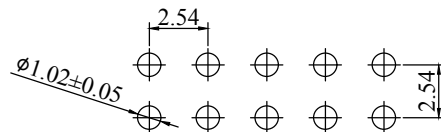

Recommended P.C.Board
 Hold Layout

B

C

A

B

C

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.54mm Pin Header H:2.54 W:2.54 Dual Row Up Angle Dip Type		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H254UX Xa/cAb-2xXX	圖號/Drawing No : 254-GR2-2xXX-ABC-X	
REV	概述/REVISION	日期/DATE	Size A4			核加/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0