


SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL


Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

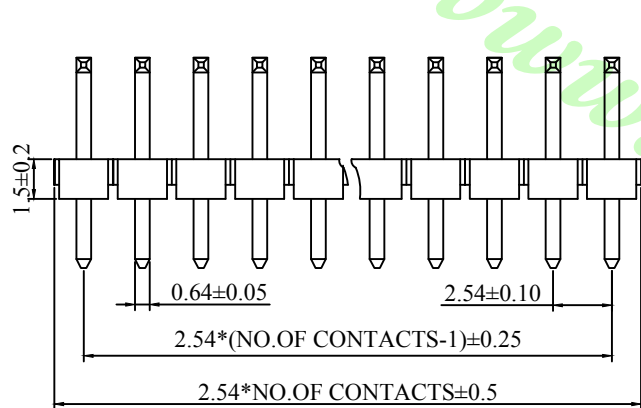

Pin Chart:



Recommended P.C.Board
Hold Layout

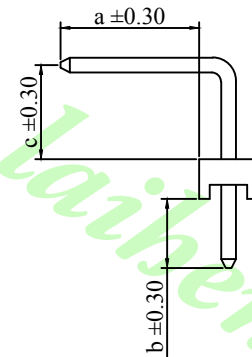

ORDER INFORMATION

LP/H 254 U X N a / c C b - 1xXX
 Pitch: 2.54mm Type U: 90° Up Angle
 Material N: NYLON 6T
 No. Of Contact Single Row: 1x02~1x40

Contact Plating

T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10: All Gold 10u"
 G15: All Gold 15u"
 G20: All Gold 20u"
 G30: All Gold 30u"

a: Pin Chart Dimension See Pin Chart
 c: Pin Chart Dimension See Pin Chart
 C: Insulation Height: 1.5mm, Width: 2.54mm
 b: Pin Chart Dimension See Pin Chart

Standard: 6/1.5C3

Pin Chart:

a : _____ mm

Standard: 6.0mm

b : _____ mm

Standard: 3.0mm

c : _____ mm

Standard: 1.5mm

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
A0	NEW DRAWING	2018.08.16	
REV	概述/REVISION	日期/DATE	

單位/Unit mm	品名/Title :
比例/Scale	2.54mm Pin Header H:1.5 W:2.54 Single Row Up Angle Dip Type
Free Size A4	料號/Part No : LP/H254UXN a/cCb-1×XX
	圖號/Drawing No : 254-GR2-1×XX-ABC-N(H1.5)

鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486		核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
		7/0	Joe	Mandy	1 of 1	A0