
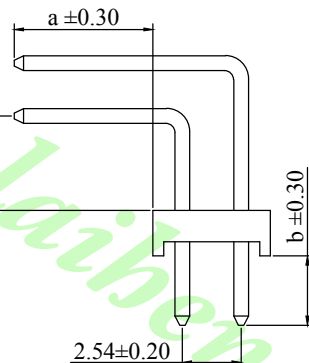


SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

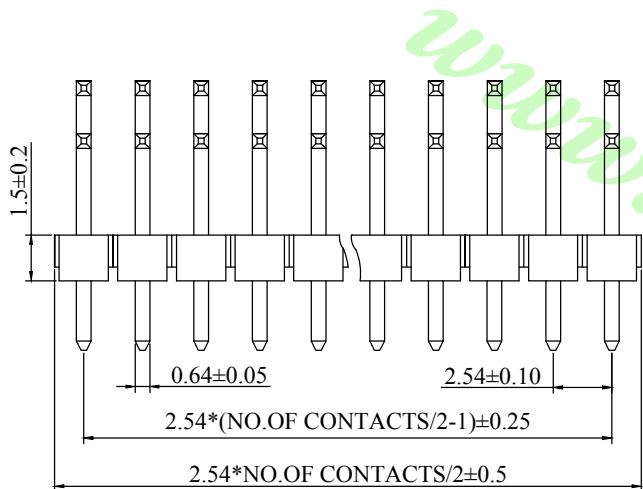

ORDER INFORMATION

LP/H 254 U X N a / c C b - 2xXX

Pitch: 2.54mm
 Type: U: 90°
 Up Angle

Material: N: NYLON 6T

No. Of Contact: Dual Row: 2x02~2x40

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10 : All Gold 10u"
- G15 : All Gold 15u"
- G20 : All Gold 20u"
- G30 : All Gold 30u"

a: Pin Chart Dimension See Pin Chart
 c: Pin Chart Dimension See Pin Chart
 C: Insulation Height: 1.5mm, Width: 5.08mm
 b: Pin Chart Dimension See Pin Chart

Standard: 6/1.5C3

Pin Chart:

a : _____ mm


Standard: 6.0mm

b : _____ mm

Standard: 3.0mm

c : _____ mm

Standard: 1.5mm

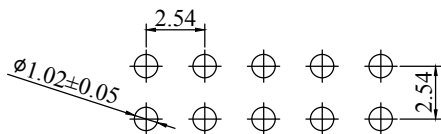

Recommended P.C.Board Hold Layout

| | | | | | | | | | | | |
|--|-------------|------------|---------------|--|--|--|--|--------------|--------------|--------------|-----------------|
| 公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | | | 單位/Unit mm | 品名/Title : 2.54mm Pin Header H:1.5 W:5.08 Dual Row Up Angle Dip Type | | | 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486 | | | | |
| A0 | NEW DRAWING | 2018.08.16 | 比例/Scale Free | 料號/Part No : LP/H254UXN a/cCb-2×XX | | | 圖號/Drawing No : 254-GR2-2×XX-ABC-N(H1.5) | 核加/APPD. 740 | 審核/CHKD. Joe | 製圖/DR. Mandy | 張數/Sheet 1 of 1 |
| REV | 概述/REVISION | 日期/DATE | Size A4 | | | | | | | | |