


SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

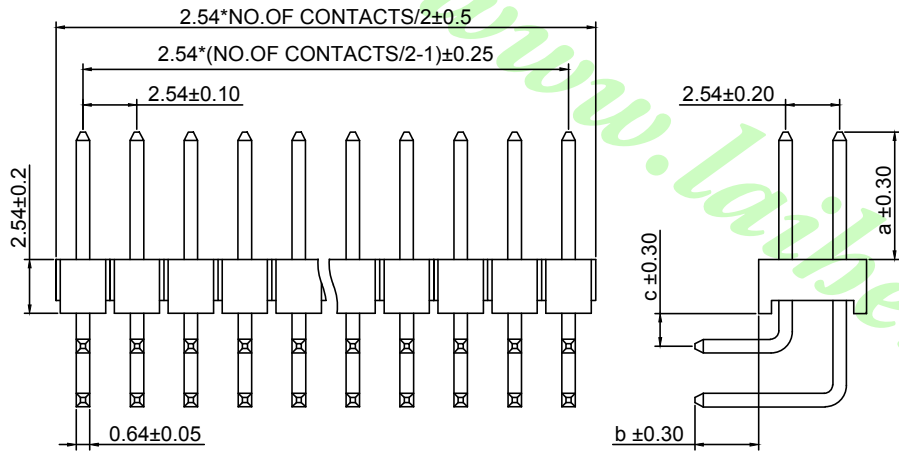

LP/H 254 R X X a A c / b - 2xXX

Pitch: 2.54mm
 Type R: 90°
 Material P: PBT, N: NYLON 6T

No. Of Contact
 Dual Row: 2x02~2x40


a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 5.08mm
 c: Pin Chart Dimension See Pin Chart
 b: Pin Chart Dimension See Pin Chart

Contact Plating
 T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10: All Gold 10u"
 G15: All Gold 15u"
 G20: All Gold 20u"
 G30: All Gold 30u"

Standard: 6A1.5/3

Pin Chart:

- a : _____ mm
Standard: 6.0mm
- b : _____ mm
Standard: 3.0mm
- c : _____ mm
Standard: 1.5mm

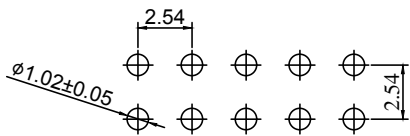

Recommended P.C.Board
 Hold Layout

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
			單位/Unit mm
			比例/Scale
A0	NEW DRAWING	2018.06.14	Free
REV	概述/REVISION	日期/DATE	Size A4

品名/Title :	2.54mm Pin Header H:2.54 W:5.08 Dual Row Down Angle Type
料號/Part No :	LP/H254RXXaAc/b-2×XX
圖號/Drawing No :	254-GRI-2×XX-A/B/C-X

鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486				
核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
7/6	Joe	Mandy	1 of 1	A0