


Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

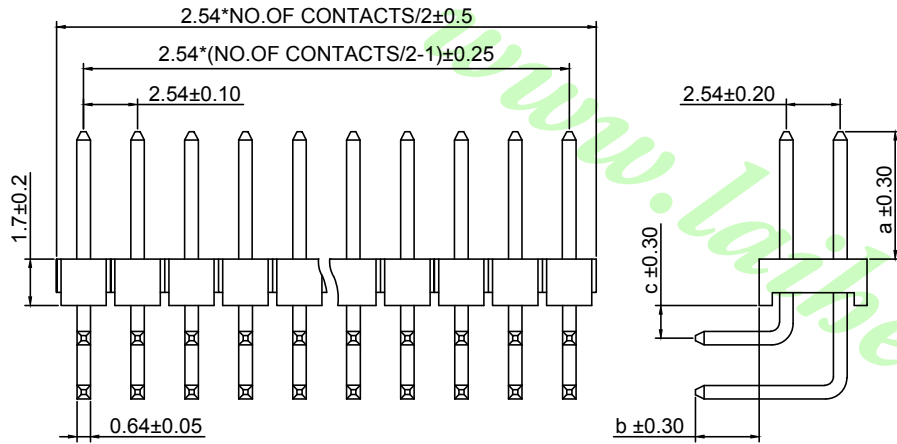

LP/H 254 R X N a B c / b - 2xXX

Pitch: 2.54mm Type R: 90° Material N: NYLON 6T No. Of Contact Dual Row: 2x02~2x40


a: Pin Chart Dimension See Pin Chart
 B: Insulation Height: 1.7mm, Width: 5.08mm
 c: Pin Chart Dimension See Pin Chart
 b: Pin Chart Dimension See Pin Chart

Contact Plating
 T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10: All Gold 10u"
 G15: All Gold 15u"
 G20: All Gold 20u"
 G30: All Gold 30u"

Standard: 6B1.5/3

Pin Chart:

a : _____ mm
 Standard: 6.0mm
 b : _____ mm
 Standard: 3.0mm
 c : _____ mm
 Standard: 1.5mm

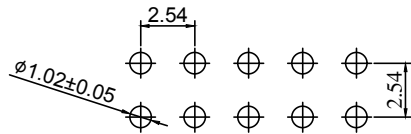

Recommended P.C.Board
 Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.54mm Pin Header H:1.7 W:5.08 Dual Row Down Angle Type	錄亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
比例/Scale			Free Size A4	料號/Part No : LP/H254RXNaBc/b-2×XX	
A0	NEW DRAWING	2018.06.14	圖號/Drawing No : 254-GR1-2×XX-ABC-N(H1.7)		核加/APPD. 740
REV	概述/REVISION	日期/DATE	製圖/DR. Mandy		審核/CHKD. Joe
			張數/Sheet 1 of 1		REV. A0