


SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

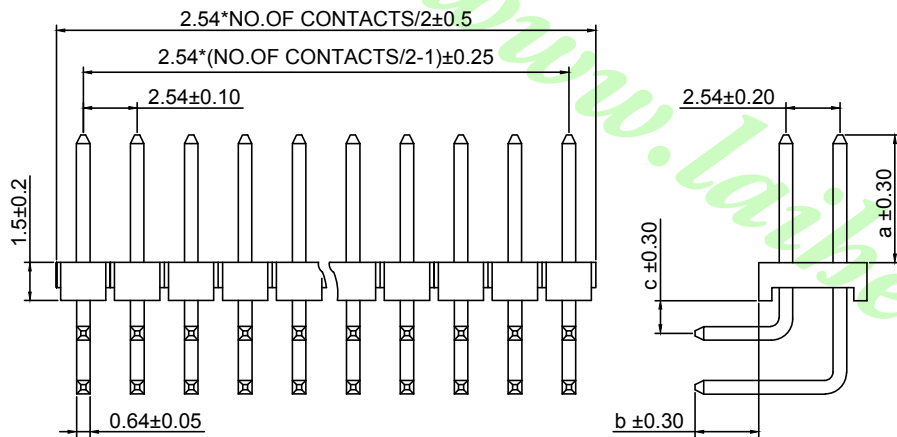

LP/H 254 R X N a C c / b - 2xXX

Pitch: 2.54mm

Type R: 90°

Material N: NYLON 6T

No. Of Contact
 Dual Row: 2x02~2x40

a: Pin Chart Dimension See Pin Chart
 C: Insulation Height: 1.5mm, Width: 5.08mm
 c: Pin Chart Dimension See Pin Chart
 b: Pin Chart Dimension See Pin Chart

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

Standard: 6C1.5/3

Pin Chart:

a : _____ mm


Standard: 6.0mm

b : _____ mm

Standard: 3.0mm

c : _____ mm

Standard: 1.5mm

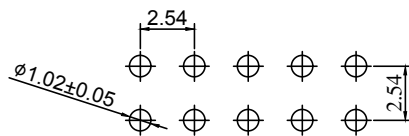

Recommended P.C.Board
 Hold Layout

		公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名/Title : 2.54mm Pin Header H:1.5 W:5.08 Dual Row Down Angle Type		鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486				
A0	NEW DRAWING	2018.06.14		比例/Scale Free	料號/Part No : LP/H254RXNaCc/b-2×XX		圖號/Drawing No : 254-GRI-2×XX-ABC-N(H1.5)	核加/APPD. 740	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1
REV	概述/REVISION	日期/DATE		Size A4							