
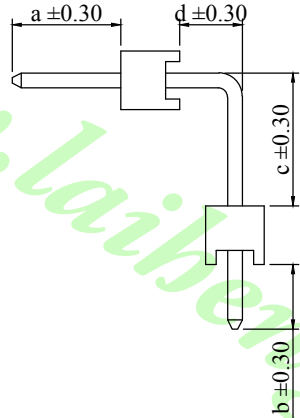


SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

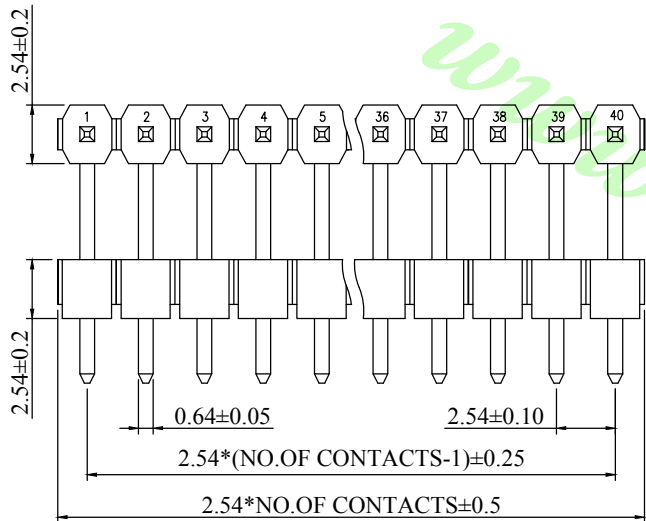


ORDER INFORMATION

LP/H 254 U X X a A d / c A b - 1xXX
 Pitch: 2.54mm Type U: 90° Up Angle
 Material P: PBT N: NYLON 6T
 No. Of Contact Single Row: 1x02~1x40

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10 : All Gold 10u"
- G15 : All Gold 15u"
- G20 : All Gold 20u"
- G30 : All Gold 30u"

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 2.54mm
 d: Pin Chart Dimension See Pin Chart
 c: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 2.54mm
 b: Pin Chart Dimension See Pin Chart



Recommended P.C.Board
 Hold Layout

Pin Chart:
 a : _____ mm
 b : _____ mm
 c : _____ mm
 d : _____ mm

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.54mm Pin Header H:2.54 W:5.08 Single Row Dual Base Up Angle Dip Type	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H254UX X aAd/cAb-1xXX	
REV	概述/REVISION	日期/DATE	Size A4	圖號/Drawing No : 254-GR2D-1xXX-ABCD-X	核加/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0