





* B TYPE

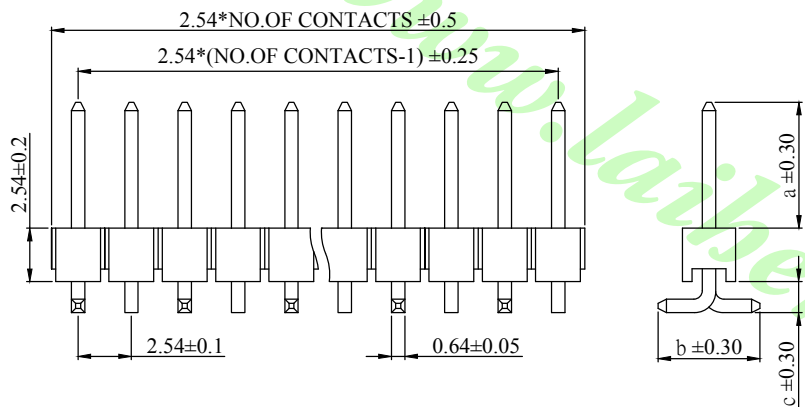


* A TYPE



B TYPE



A TYPE

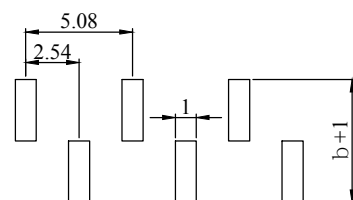

Recommended P.C.Board Hold Layout

SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 254 T X N a A c - b - 1xXX XT

Pitch: 2.54mm Type T: SMT
 Material N: NYLON 6T

Contact Plating

T : Tin
 G : Gold
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10 : All Gold 10u"
 G15 : All Gold 15u"
 G20 : All Gold 20u"
 G30 : All Gold 30u"

other
 AT: A Type
 BT: B Type

No.Of Contact
 Single Row: 1x01~1x40

SMT Expand Size: 5.0~8.0mm
 b: Pin Chart Dimension See Pin Chart
 Standard: 5

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 2.54mm
 c: Pin Chart Dimension See Pin Chart
 Standard: 6A0.64

Pin Chart:

a : _____ mm
 Standard: 6.0mm
 b : _____ mm
 Standard: 5.0mm
 c : _____ mm
 Standard: 0.64mm

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
A0	NEW DRAWING	2018.08.16
REV	概述/REVISION	日期/DATE

單位/Unit mm	品名/Title :
比例/Scale	2.54mm Pin Header H:2.54 W:2.54 Single Row SMT Type
Free	料號/Part No :
Size	A4
圖號/Drawing No :	
254-XXM-1×XX-ABC-N	

鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
7/0	Joe	Mandy	1 of 1	A0