
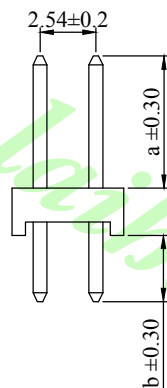


SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Copper Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T
 Plating: All Gold or Tin

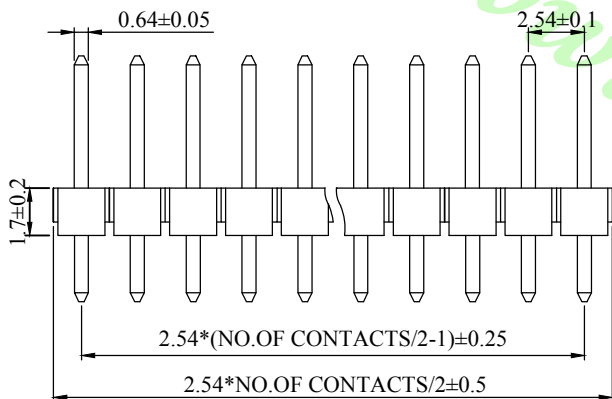

ORDER INFORMATION


LP/H 254 S X N a B b - 2xXX
 Pitch: 2.54mm Type S: 180°
 Material N: NYLON 6T
 No. Of Contact
 Dual Row: 2x02~2x40

a: Pin Chart Dimension See Pin Chart
 B: Insulation Height: 1.7mm, Width: 5.08mm
 b: Pin Chart Dimension See Pin Chart

Contact Plating

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

Standard: 6B3

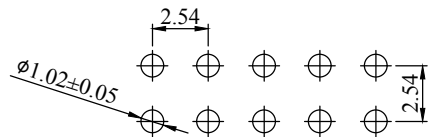

Recommended P.C.Board Hold Layout

Pin Chart:

a : _____ mm

Standard: 6.0mm

b : _____ mm

Standard: 3.0mm

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.54mm Pin Header H:1.7 W:5.08 Dual Row Straight Dip Type	
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H254SXNaBb-2×XX	
REV	概述/REVISION	日期/DATE	Size A4	圖號/Drawing No : 254-GS-2×XX-AB-N(H1.7)	核加/APPD. 740 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0